



Water Sensitive Urban Design Guidelines

Wollondilly Shire Council

July 2026



wave
CONSULTING



Document Management

Version	Date	ID	Authors
1 - Draft	17 June 2019	2018-52-D26	Ralf Pfleiderer & Rob Catchlove
2 – Updated draft (without graphics)	11 February 2020	2018-52-D48	Ralf Pfleiderer & Rob Catchlove
3 – Final	27 February 2020	2018-52-D50	Ralf Pfleiderer & Rob Catchlove
3 – Final with updated species	10 March 2020	2018-52-D51	Ralf Pfleiderer & Rob Catchlove
4 – New cover photo	27 April 2020	2018-52-D59	Ralf Pfleiderer & Rob Catchlove
5 – Including precinct image	19 May 2020	2018-52-D61	Ralf Pfleiderer & Rob Catchlove
6 – Updated to include standard drawing reference and precedent images	17 July 2026	2024-059-D1	Rob Catchlove

Disclaimer

This document may not be used for purposes other than those for which it is compiled. While every care has been taken to compile this report, Wave Consulting Australia Pty Ltd accept no liability whatsoever for any loss (including without limitation direct or indirect loss and any loss of profit, data or economic loss) occasioned to any person nor for any damage, cost, claim or expense arising from reliance on this report or any of its content.

Table of Contents

1	Introduction	5
2	Context	5
2.1	<i>Legislation and Wollondilly's Council's framework</i>	5
2.2	<i>Risk based framework</i>	6
2.3	<i>Regional planning perspective</i>	6
2.4	<i>Wollondilly's vision for water</i>	6
3	Principles of integrated water management	8
4	Integrated water objectives and targets	10
4.1	<i>Zero impact</i>	10
4.2	<i>Requirements</i>	10
4.2.1	Residential	10
4.2.2	Industrial and commercial	12
4.3	<i>Subdivisions</i>	13
4.4	<i>Water demand baseline and targets</i>	14
4.5	<i>Stormwater runoff baseline and targets</i>	14
5	Integration of WSUD into developments	16
6	What defines a high performing and successful WSUD asset?	16
7	IWM options	17
7.1	<i>Options and types of development</i>	17
7.1.1	Residential Development	17
7.1.2	Commercial and Industrial	17
7.2	<i>Technical references</i>	17
7.3	<i>Rainwater tanks</i>	18
7.4	<i>Swales</i>	20
7.5	<i>Bioretention / raingardens</i>	23
7.6	<i>Tree pits</i>	26
7.7	<i>Infiltration trenches</i>	28
7.8	<i>Constructed wetlands and sediment ponds</i>	30
7.9	<i>Fixtures and water efficient options</i>	34
8	Planning, design, & construction process	35
8.1	<i>Works Adjacent Waterways</i>	35
8.2	<i>Early Planning – knowing your site and your requirements</i>	35
8.3	<i>Concept Design – objective of and submission to council requirements</i>	36
8.4	<i>Submission of the Concept Design</i>	27
8.5	<i>Detailed Design</i>	27

8.6	<i>Submission of the detailed design</i>	28
8.7	<i>Sediment control during construction</i>	28
8.8	<i>Construction and maintenance</i>	29
8.9	<i>Construction Phase – Inspection of WSUD Assets</i>	29
8.10	<i>Works as Executed (WAE) Drawings & Compliance Certificates</i>	29
8.11	<i>Defect liability period</i>	30
8.12	<i>Signage</i>	30
8.13	<i>Handover of WSUD Assets</i>	30
9	Construction and maintenance	32
10	References	33
11	Attachments	35
11.1	<i>Attachment 1 - Development Application Checklist (lodged with DA)</i>	35
11.2	<i>Attachment 2 - Construction Certificate Application Checklist (lodged with CC)</i>	37
11.3	<i>Attachment 3 – MUSIC parameters</i>	38
11.4	<i>Attachment 4 – Plant species and densities</i>	39
11.4.1	Swales	39
11.4.2	Raingardens and bioretention basin	39
11.4.3	Constructed wetlands, sediment basins and ponds	39
11.4.4	Core functional plant species	40
11.4.5	Tree species	43

1 Introduction

Water Sensitive Urban Design (WSUD) integrates urban water cycle management with urban planning and design, with the aim of mimicking natural systems to minimise negative impacts on the natural water cycle and receiving waterways. It offers an alternative to the traditional conveyance approach to stormwater management by managing water at its source, and thereby reducing the impact of urban development on waterways and required size of the downstream stormwater infrastructure network. It seeks to minimise the influence of impervious surfaces on waterways, reuse water on site, incorporate retention basins to reduce peak flows, and incorporate treatment systems to remove pollutants from impacting on waterways.

The key principles of WSUD are:

- a. Protect and enhance natural water systems within urban environments.
- b. Integrate stormwater treatment into the landscape, maximising the visual and recreational amenity of developments.
- c. Improve the quality of water draining from urban developments into receiving environments.
- d. Reduce runoff and peak flows from urban developments by increasing local detention times and minimising impervious areas.
- e. Minimise drainage infrastructure costs of development due to reduced runoff and peak flows.

Reducing the impact of stormwater run-off is particularly important in Wollondilly Shire Council, which has swimmable creeks and rivers with icon species such as the platypus and the koala living in or near them, and two endangered species: Sydney Hawk Dragonfly and the Macquarie Perch. Uncontrolled, business as usual stormwater discharge will do irreparable harm to these natural ecosystems, that takes orders of magnitude more investment to repair.

This document should be read in conjunction with the Wollondilly Water Strategy (2020) and Wollondilly Water Policy (2020).

2 Context

2.1 Legislation and Wollondilly's Council's framework

The WSUD Guidelines, Integrated Water Management (IWM) Policy, IWM Strategy, and associated WSUD Standard Drawings support Council's obligations and the intent of relevant Commonwealth and New South Wales legislation, including:

- Local Government Act 1993 (NSW) – requiring councils to consider the principles of ecologically sustainable development in carrying out their functions.
- Environmental Planning and Assessment Act 1979 (NSW) – promoting ecologically sustainable development and the protection of biodiversity, ecological communities and habitat.
- Protection of the Environment Operations Act 1997 (NSW) – the prohibition of pollution of waters.
- Water Management Act 2000 (NSW) – provide for the protection, conservation and ecologically sustainable development of the water sources of the State, and for other purpose.
- Biodiversity Conservation Act 2016 (NSW) – to maintain the diversity and quality of ecosystems and enhance their capacity to adapt to change and provide for the needs of future generations,

The WSUD Guidelines, Integrated Water Management (IWM) Policy, IWM Strategy and associated standard drawings also support the delivery of Council's strategic planning framework, including:

- Community Strategic Plan 2040 – Goal 7.2: Protect and enhance our waterways.
- Local Strategic Planning Statement (LSPS) – Planning Priority 12: Valuing the Ecological Health of Wollondilly's Waterways, including the objective that Council will work towards achieving zero impact on local waterways from development.

The pollutant load modelling presented within Section 5 – Pressures (Current and Future) of Council's Integrated Water Management Strategy identifies urban stormwater runoff from business-as-usual development as the greatest future risk to the health of local waterways. These WSUD Guidelines, together with the associated IWM Policy, Strategy and WSUD standard drawings, seek to mitigate the risk of urban stormwater by promoting best-practice stormwater management and integrated water cycle management principles.

Collectively, they provide a framework to minimise the impacts of development on waterways and contribute to Council's objective of achieving no net deterioration in waterway health across the Wollondilly Local Government Area which aligns with the intent of the legislation above.

2.2 Risk based framework

The vision is consistent with the State Government policy objectives to adopt a risk-based framework

2.3 Regional planning perspective

From a regional perspective, the Greater Sydney Commission has outlined the vision of the region and link between urban development and water and sustainability initiatives.

The vision for Greater Sydney as a metropolis of three cities – the Western Parkland City, the Central River City and the Eastern Harbour City and a 30-minute city – means residents in the Western City District will have quicker and easier access to a wider range of jobs, housing types and activities. This vision will improve the District's lifestyle and environmental assets¹. The District Plan's planning priorities and actions include infrastructure and collaboration, liveability, productivity, sustainability and implementation. These synchronise well with Create Wollondilly Community Strategic Plan 2033.

Delivering on this vision, within WSC LGA, means creating liveable sustainable townships, particularly within the Wilton development.

The Development Control Plan provides specific planning and design guidelines to support the Local Environmental Plan (LEP). From a water management perspective, the DCP states that "All stormwater generated from any development shall be treated to an acceptable standard to maintain water quality" (Section 9.3 of Volume 1). Individual growth area precincts have specific Development Control Plans, and should be referred to when development applications are within those areas.

2.4 Wollondilly's vision for water

Wollondilly's vision for water, taken from the Wollondilly Shire Council's Integrated Water Management Strategy, is to **maintain our pristine creeks and rivers to be swimmable and ecologically rich and diverse**. This requires that new development has **zero impact** on the waterways with no extra stormwater runoff entering the waterways (compared to natural environments) and wastewater being treated and reused.

¹ <https://www.greater.sydney/western-city-district-plan>

Maintaining pristine waterways will:

- Maintain a healthy and diverse ecosystem of native plants and animals.
- Maintain good water quality for in stream health and for downstream water supply
- Allow for direct contact recreation such as swimming
- Maintain or enhance vegetation buffer corridors either side of waterways to support healthy waterways and biodiversity.

3 Principles of integrated water management

Sustainable and integrated water management (IWM) is based on minimising the impact of developments on the water cycle. This requires the evaluation of all elements of the water cycle and how they impact the environment.

Principles of IWM include:

- Minimising impervious areas (roads, roof and pavements) through the use of pervious surfaces and green spaces
- Disconnecting the flow of water from an impervious surface, directly to a drain and waterway, and instead retaining, filtering and detaining that runoff
- Maximising synergies with stormwater management and landscaping to promote healthy green vegetation and soil to improve infiltration and water retention
- Capture, retain, reuse and/or treat any run-off from impervious area at source (i.e. rainwater tanks and passively irrigated landscaped areas)
- Maximise the reuse of captured rainwater and stormwater to reduce potable water consumption and reduce direct runoff
- Ensure wastewater is treated and reuse onsite or via centralised system that does not discharge to the local waterway
- Protect groundwaters from extraction that is not replenished at the same rate. Replenishment must be of a suitable quality and rate to maintain the groundwater resource for future generations.

The flow and volume of stormwater is the biggest contributor to waterway degradation, in addition to the impact of pollutants commonly found in stormwater and transported into waterways and receiving environments. Therefore, retaining as much as possible stormwater on lot or within the catchment is the primary aim. Retention should be maximised through the following suite of actions;

- Minimise impermeable area and ensure green areas have good to high infiltration capacity.
- Maximise the size of rainwater tanks for each building as well as the demand to internal uses and irrigation. An empty tank is a good tank to ensure maximum capture of the next rain event.
- Include a leaking outlet for tanks that do not have a large internal use such a commercial or office building with only daytime, toilet demand.
- Infiltrate overflow and leaking outlets from tanks as well as any other on lot runoff into on lot infiltration or absorption trench systems.
- Connection of road run-off to landscaped WSUD devices such as swales and infiltration trenches to infiltrate and treat off-lot runoff at source.
- Include an end of line system as a last resort, where required, to retain and treat any remaining run-off and manage peak flow.
- Consider stormwater harvesting systems where there is a suitable demand (open space irrigation or commercial/industrial use) that can utilise the water.

By retaining the stormwater within the catchment, the pollutants that would have been carried to the waterways have been effectively removed.

A conceptual diagram of a precinct that is consistent with the principles and design of this policy is shown below.

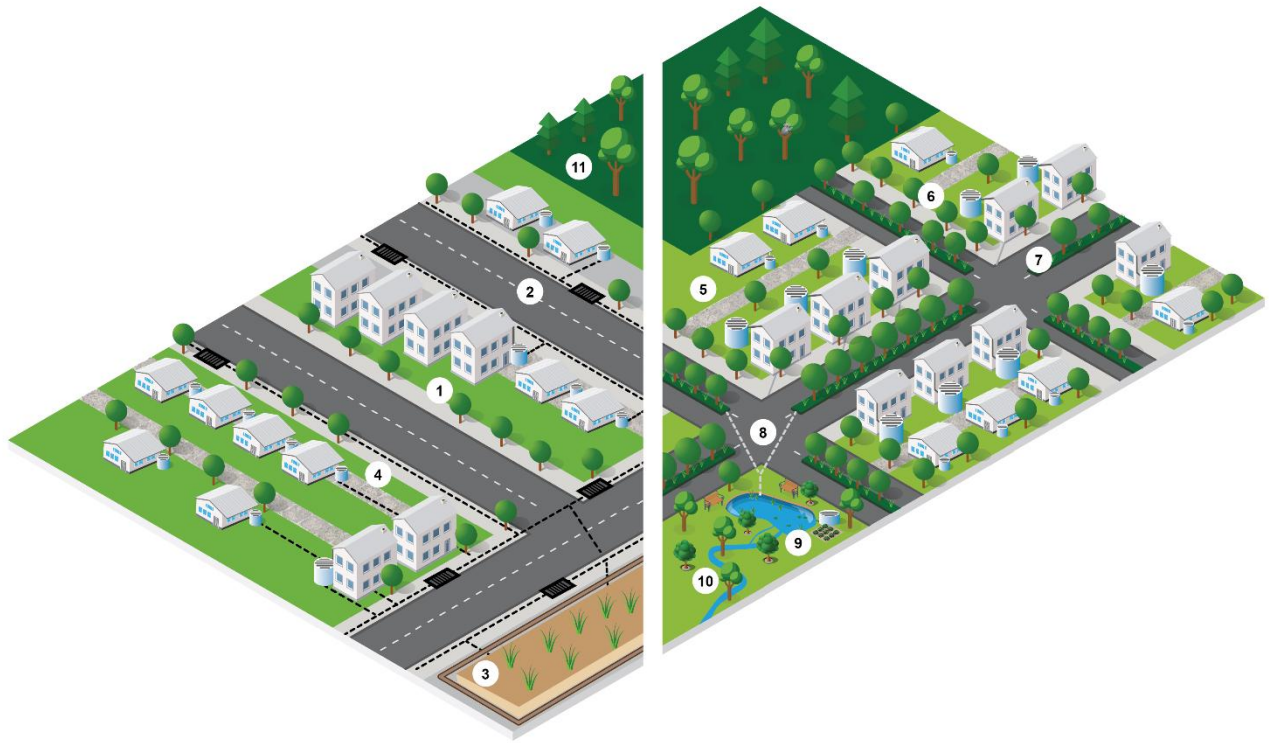


Figure 1. Integrated water precinct – BAU on left, and Zero Impact on right.

The numbered references on the diagram are as follows:

Business as Usual

1. Typical streetscape with only one tree per lot, no media strips, and all water directly piped and removed
2. Typical pits and pipes used in urban developments to remove water quickly
3. Additional land used to filter stormwater pollutants, often only delivering one benefit
4. Rainwater tanks sized to only meet BASIX

Zero impact development

5. Low and high density still able to be developed with zero impact
6. Rainwater tanks on lots used for all non-potable end uses
7. Greener more resilient streetscapes deliver amenity benefits, cooler streets suitable for walking, and deliver stormwater quality benefits as well as conveyance of storm events
8. Culverts still used to convey flows across intersections and T-junctions
9. Small wetlands may be used to provide amenity and biodiversity benefits
10. Zero impact aims to deliver only natural and base flows to local creeks, and prevent excess stormwater flows that come directly from impervious surfaces.

4 Integrated water objectives and targets

The policy aim is to deliver an integrated water solution for Wollondilly that protects the pristine waterways, endangered species, maintains and improves the condition of waterways, in the context of a growing population and changing land use.

The policy objectives are to:

- Achieve a zero impact of stormwater on local waterways
- Achieve a zero impact of wastewater on local waterways
- Use water to support sustainable development

4.1 Zero impact

The Integrated Water Management Policy, Strategy and WSUD Guidelines refer to achieving a 'zero impact'.

To achieve a zero impact on waterways, the runoff from impervious surfaces will need to be reduced to a near natural condition. There are two main impervious surfaces that need to be managed in new developments and these are the road network and roof area.

Roof area can be achieved through maximising the use of stormwater harvesting eg. rainwater tanks. This means most of the water consumed in buildings (residential or commercial) would be supplied by rainwater and backed up by potable supplies. This reduces run-off, reduces potable water use and reduces pollutants to waterways.

Stormwater impacts from impervious roads can be reduced through minimising pavement surfaces and maximising synergies with landscaped areas, and, where necessary, including an end of line treatment or harvesting system. In areas with recycled water (purple pipe), there will be more of a reliance on this method.

Zero impact also refers to the impact of wastewater discharges, from sewage treatment plants managed by local water authorities, and ensuring that there are no point discharges from these plants. Instead wastewater is to be treated and reused.

By encouraging water to be managed in these ways, it improves support for water quality outcomes, healthier aquatic ecosystems, reduced stormwater impacts and greater resilience community resilience and climate change.

4.2 Requirements

The tables below are to be used for all new development applications. All the requirements **must** be provided as part of the development application to enable assessment.

4.2.1 Residential

Note: Which ever trigger is greater shall apply. Secondary dwellings and sheds less than 60 m² are excluded from these requirements.

Requirements	2 lot Or 450 m ² Impervious area	3-10 lots Or 450-2500 m ² Impervious area	10+ lots Or 2500+ m ² Impervious area
Reduce stormwater runoff to an equivalent of between 2.5 and 3 ML / year / 1 hectare of urban area	Yes	Yes	Yes

Requirements	2 lot Or 450 m ² Impervious area	3-10 lots Or 450-2500 m ² Impervious area	10+ lots Or 2500+ m ² Impervious area
Reduce potable water use by > 70% compared to business as usual	Yes	Yes	Yes
Mark on plans all relevant appliances, drains, pipes and other assets that related to potable water, wastewater, rainwater and stormwater, and how each contributes to a 'zero impact' development.	Yes	Yes	Yes
All proposed WSUD infrastructure aligns with Council's WSUD guidelines, Engineering specifications and WSUD Standard Drawings.	Yes	Yes	Yes
Ensure smart tank technology could in the future be integrated into residential, commercial and industrial developments.	Yes	Yes	Yes
All stormwater to drain through WSUD infrastructure prior to discharging from the site.		Yes	Yes
WSUD is to support at least 80% of street trees and landscaped areas.	-	Yes	Yes
Prepare an Integrated Water Plan, including who owns and maintains all associated assets, and where all impervious surfaces drain to. See section 8.2 Early Planning for requirements.	-	Yes	Yes
Use Council MUSIC template model to demonstrate how the outcomes of this policy will be achieved.	-	Yes	Yes
For developments where demand is greater than 5 ML / year demonstrate how this water will be sourced through rainwater, stormwater or recycled water.	-	-	Yes
Where the local water authority / provider advisees there is access to a recycled water network, include a recycled water meter and connection point.	-	-	Yes
Monitoring of waterways to demonstrate downstream waterway of urban development is of a similar condition / quality to designated reference stream (see Guideline).	-	-	Yes
Any development that is not serviced by a reticulated wastewater network available must comply with the On-site Sewage Management and Greywater Re-use policy and principles of IWM Strategy to deliver a zero impact on waterways.	-	-	Yes
Waterway and WSUD educational sign to be installed as per section 8.12	-	-	Yes
Prepare an Erosion and Sediment Control Plan that aligns with requirements from Managing Urban Stormwater: Soils and construction - Volume 1 Landcom 2004 or alternative document meeting or exceeding these standards. Note – Managing sediment runoff is critical for the protection and longevity of WSUD assets and the health of the natural waterways.	Yes	Yes	Yes

Requirements	2 lot Or 450 m² Impervious area	3-10 lots Or 450-2500 m² Impervious area	10+ lots Or 2500+ m² Impervious area
Prepare a staged erosion and sediment control plan that covers construction stages to final vegetation and establishment, developed by a Certified Professional in Erosion and Sediment Control (CPESC). Note – this is required for larger sites to manage the significant risk posed to WSUD infrastructure, natural areas and waterways.	-	-	Yes

4.2.2 Industrial and commercial

Note: Which ever trigger is greater shall apply.

Requirements	Up to 450 m² Or 2 lot subdivision Impervious area	450-250 m² Or 3-10 lots Impervious area	2500+ m² Or 10 lots+ Impervious area
Reduce stormwater runoff to an equivalent of between 2.5 and 3 ML / year / 1 hectare of urban area	Yes	Yes	Yes
Reduce potable water use by > 70% compared to business as usual	Yes	Yes	Yes
Mark on plans all relevant appliances, drains, pipes and other assets that related to potable water, wastewater, rainwater and stormwater, and how each contributes to a 'zero impact' development.	Yes	Yes	Yes
All proposed WSUD infrastructure aligns with Council's WSUD guidelines, Engineering specifications and WSUD Standard Drawings.	Yes	Yes	Yes
Ensure smart tank technology could in the future be integrated into residential, commercial and industrial developments.	Yes	Yes	Yes
WSUD is to support at least 80% of street trees and landscaped areas on public land.	-	Yes	Yes
Prepare an Integrated Water Plan, including who owns and maintains all associated assets, and where all impervious surfaces drain to. See section 8.2 Early Planning for requirements.	-	Yes	Yes
Use Council MUSIC template model to demonstrate how the outcomes of this policy will be achieved.	-	Yes	Yes
For developments where demand is greater than 5 ML / year demonstrate how this water will be sourced through rainwater, stormwater or recycled water.	-	-	Yes
Where the local water authority / provider advises there is access to a recycled water network, include a recycled water meter and connection point.	-	-	Yes

Requirements	Up to 450 m² Or 2 lot subdivision Impervious area	450-250 m² Or 3-10 lots Impervious area	2500+ m² Or 10 lots+ Impervious area
Monitoring of waterways to demonstrate downstream waterway of urban development is of a similar condition / quality to designated reference stream (see Guideline).	-	-	Yes
Any development that is not serviced by a reticulated wastewater network available must comply with the On-site Sewage Management and Greywater Re-use policy and principles of IWM Strategy to deliver a zero impact on waterways.	-	-	Yes
Waterway and WSUD educational sign to be installed as per section 8.12	-	-	Yes
Prepare an Erosion and Sediment Control Plan that aligns with requirements from Managing Urban Stormwater: Soils and construction - Volume 1 Landcom 2004 or alternative document meeting or exceeding these standards. Note – Managing sediment runoff is critical for the protection and longevity of WSUD assets and the health of the natural waterways.	Yes	Yes	Yes
Prepare a staged erosion and sediment control plan that covers construction stages to final vegetation and establishment, developed by a Certified Professional in Erosion and Sediment Control (CPESC). Note – this is required for larger sites to manage the significant risk posed to WSUD infrastructure, natural areas and waterways.	-	-	Yes

Impervious areas are defined as hard surfaces including roads, driveways, roofs, where virtually all rainfall becomes surface flow that flows to local waterways. All impervious areas are included in this policy, irrespective of the type, zoning and use of the property.

Smart tank technology refers to technology that a) can measure water levels in tanks and send the data to a remote control centre, and b) remotely control the release of water from the tank.

4.3 Subdivisions

Beyond the lot (where rainwater tanks are reducing the majority of the runoff) the road reserve will need to be designed to filter and convey more stormwater runoff. The preferred approach is to maximise synergies with stormwater management and the landscaped streetscape and open space using designs from Council's WSUD Standard Drawings. This promotes healthier more drought resilient landscaped areas and passively reduce runoff and stormwater pollutants. Flood peaks would also be reduced through both rainwater tanks and swales.

This on lot and road design solution would effectively minimise the need for any downstream water quality infrastructure. Peak flow can still be managed through wetlands and bioretention basins – less end of line pressure on these systems will enable greater biodiversity and amenity outcomes in addition to reduced maintenance burdens and frequency of removing sediment to maintain required volumes.

This guideline provides technical advice on the design approach to keep surface water flows from impervious surfaces above ground and within WSUD assets (which will create green corridors in an urban environment) reducing the extent of traditional piped stormwater networks, and potentially reducing the cost of urban development.

A 79% reduction in impervious flows would be as close as possible to a zero-impact scenario, which closely mimics the hydrological runoff regime of predeveloped catchments. It is not practical or appropriate in protecting the downstream environment to reduce all surface runoff to zero.

Wastewater treatment and discharges would also need to be reviewed to ensure they also have a zero impact on waterways and downstream receiving waters (otherwise this new strategic design approach for rainwater and stormwater is undermined through other discharges). Integrated Water Management Plans that incorporate both wastewater, stormwater and potable water are required for significant sites – See section 4.2 Requirements.

4.4 Water demand baseline and targets

Development type	Average potable water use - baseline (litres / day)	Average water efficiency saving (litres / day)	Average rainwater tank supply (litres / day)	Average WSC potable target (litres / day)
1 household	620	180	252	185
Commercial (1 ha area) *	6,800	70% less potable water use		
Industrial (1 ha area) *	7,700	70% less potable water use		

* Water use varies a lot within different types of commercial and industrial developments, and applicants should demonstrate how non-potable water uses to achieve an 70% saving from a similar industry use is achieved.

Water use figures (daily and end use) were sourced from Sydney Water (2018) Wave Conservation Report, Sydney Water Daily Water Use report, Smart Water Melbourne Residential Water Use Studies (2013), and Green Building Council of Australia Potable Water Calculator (2015).

4.5 Stormwater runoff baseline and targets

The following runoff rates are required to meet the zero impact target for runoff from impervious areas.

Development type	Baseline (ML / year)	WSC target (ML / year)
1ha pre-developed – base flow	1.23	-
1ha pre-developed – stormwater flow	1.03	-
1ha pre-developed – total flow	2.26	-
1ha development – base flow (75% impervious) *	0.31	1.23
1ha development – stormwater flow (75% impervious) *	6.36	1.27
1ha development – total flow (75% impervious) *	6.67	2.50
1ha industrial development – base flow (90% impervious) *	0.12	1.23
1ha industrial development – stormwater flow (90% impervious) *	7.63	1.27
1ha industrial development – total flow (90% impervious) *	7.75	2.50

* Impervious percentages are consistent with Western Sydney Engineering Design Manual.

Average annual volumes to be modelled using 6-minute timestep over 10 year period.

5 Integration of WSUD into developments

The preferred WSUD asset types and distribution of systems should be determined at the outset of a development and based on the council's strategies, targets (as discussed further in Section 8.1), WSUD Guidelines and WSUD Standard Drawings. The WSUD system/s used should aim to also support water conservation, biodiversity and a resilient urban tree network and landscaped areas.

Larger developments and precincts must integrate WSUD throughout the developments as much as reasonably practical by maximising synergies with the street tree network and landscaped areas as well as providing stormwater harvesting opportunities including rainwater tanks or wetlands. End of line systems such as wetlands and retention basins can be used to meet their water quality and flow requirements.

Smaller and single lot developments will meet their requirement through a single rainwater tank and/or raingarden or similar treatment system.

Section 7 outlines the preferred assets types within Wollondilly Shire Council LGA.

6 What defines a high performing and successful WSUD asset?

WSC consider that, in addition to meeting water quality targets and objectives, a successful WSUD asset must:

- Accessible to the public and include educational signage at one or more prominent location to inform the community of the design intent of the WSUD infrastructure
- Be linked to open space and designed to enhance the biodiversity, liveability and aesthetic outcomes
- Use local indigenous plant species at appropriate planting densities and high diversity rates to increase and support local biodiversity
- Utilise 80% of the landscaped area as part of the treatment train.
- Not contain any batters steeper than a 1:3 slope
- Not contain any retaining walls greater than 900mm, and not contain retaining walls for more than 50% of the perimeter of the asset
- Include simple structures for high flows, bypasses and overflow weirs to manage flows
- Use dedicated sediment traps to capture sediment that are easy to clean and access from the road.
- Use low maintenance grass varieties for surfaces where there is a minimum of 200 mm subsurface storage (topsoil or aggregate).
- Avoid use of invasive and high maintenance turf varieties such as kikuyu, couch and buffalo.
- Not be online or within an existing stream (order 1, 2 or 3 as defined by WaterNSW)
- Where possible and safe to do so, contain additional infrastructure such as seating to deliver multiple benefits to the community
- Be designed and installed in a manner that aims to minimise the cost and resource burden on Council and the community
- Avoid still and stagnant water in all asset types.
- Passively irrigate trees to support establishing canopy cover, delivering faster shading, and increasing evaporation rates which supports increased cooling.
-
- Avoids small areas of grass which are maintenance intensive
- Provides a rigorous establishment maintenance routine to ensure survival of planting and prevent weeds from establishing
- Prevents introduction of new high priority weeds, particularly aquatic weeds such as *Ludwigia* spp, through meticulous decontamination of machinery before entering site

7 IWM options

Proponents have an option to use one or more, individually or as a combination, of the following WSUD asset types to comply with stormwater treatment requirements.

7.1 Options and types of development

The tables below note where each asset is preferred as part of a treatment train and solution to meeting the requirements.

7.1.1 Residential Development

Water sensitive design measure	Allotment scale	Street scale	Regional scale	Suitability for rural development	On Private or Public land
Rainwater tanks	Yes	N/A	N/A	Yes	Private
Vegetated swales	Yes	Yes	Yes	Yes	Public
Infiltration trenches	Yes	Yes	Yes	Yes	Public
Bioretention systems / raingardens	Yes	Yes	No	No	Public
Tree pits	Yes	Yes	No	No	Public
Constructed wetlands	No	No	Yes	Yes	Public

7.1.2 Commercial and Industrial

Water sensitive design Measure	Commercial	Industrial	On Private or public land
Rainwater tanks	Yes	Yes	Private
Vegetated swales	Yes	Yes	Both
Infiltration trenches	Yes	Yes	Both
Bioretention systems / raingardens	Yes	Yes	Both
Tree pits	Yes	Yes	Both
Constructed wetlands	Sometimes	Sometimes	Both

7.2 Technical references

Refer to Council's WSUD Standard Drawings and Engineering Specifications to lead on from this guideline and further support technical guidance. Various other WSUD guidelines have been published in the past by state governments, local government, water authorities, academic and capacity building organisations, and these should be referenced and used in the detailed design process. Where there are any conflicts between this guideline and others, this guideline should be used.

The following technical guidelines, in alphabetic order, are useful references:

- Aspect Studios, 2024. Western Sydney Street Design Guidelines Supplementary Report.
- Blacktown City Council, 2020. WSUD developer handbook. MUSIC modelling and design guide 2020.
- Melbourne Water, 2005. WSUD Engineering Procedures: Stormwater. CSIRO Publishing.
- Melbourne Water, 2019. Constructed Wetland Design Manual.
- Payne, E.G.I., Hatt, B.E., Deletic, A., Dobbie, M.F., McCarthy, D.T. and Chandrasena, G.I., 2015. Adoption Guidelines for Stormwater Biofiltration Systems, Melbourne, Australia: Cooperative Research Centre for Water Sensitive Cities.
- Water By Design, 2014. Bioretention Technical Design Guidelines Version 1.1.
- Western Sydney Planning Partnership, 2019. Engineering Guidelines.

7.3 Rainwater tanks

Rainwater tanks are ubiquitous throughout Wollondilly as the primary source of water for anyone not on town water supplies. They should also be encouraged in urban areas and new developments, due to their capacity to reuse rainwater and reduce runoff. Collecting roof runoff for subsequent reuse they conserve potable mains water, reduce stormwater runoff volumes and remove pollutants. Rainwater tanks should be plumbed to all non-potable internal uses such as toilets, laundry and hot water units as well as used for irrigation to ensure a year-round demand. An empty tank is a good tank to maximise the capture of any future rainfall events. This will reduce the increased stormwater run-off resulting from urban developments. This in turn reduces the pressure on the council drainage system and the impact on local waterways. Increased flows to creeks and streams are the single biggest reason for them being degraded post development.

All design work associated with rainwater tanks should be consistent with the Wollondilly Shire Council WSUD Standard Drawings.

The sizing of the tank and demand of the rainwater in the tank is very important in achieving a zero-impact objective. The table below outlines the proportional size and water demand, dependent on the roof area(s) of the proposed development.

Note the focus on impervious area, not people, as the area is the driver of excess runoff.

Size of roof (sqm)	Minimum size of rainwater tank (litres)	Minimum average daily demand (litres/ day) *
100	4,000	600
200	8,000	1,200
300	12,000	1,800
500	20,000	3,000
1,000	40,000	6,000

* A slow leak (or variations to the leaking rate above 0.33 l / m² / day of impervious area) to a garden area can be used to increase 'water demand', but Council will review these rates to ensure there is not an excess of leaking to a landscape / vegetated area to absorb the rainwater.

Again, all design work associated with rainwater tanks should be consistent with the Wollondilly Shire Council WSUD Standard Drawings.

Some design elements that also need to be considered are:

1. Gutter guards and first flush systems are important in preventing leaves and sticks and other pollutants entering rainwater tank
2. Smart tank technology is encouraged (see Section 4.2 for definition)
3. Potable back up is required, and located in the pump housing alongside the pump and filter,
4. Internal uses of rainwater should include toilet flushing, laundry and hot water

5. All outdoor watering should use rainwater as its primary source. This includes a 'slow leak' that slowly and consistently releases water to a defined area of the garden planted with vegetation that thrives in damp soils.
6. Overflow systems to central median swales should be plumbed as per NCC Volume 3 Plumbing Code. Overflows can also drain to a tree pit in the road reserve, pending agreement with Council.

Further guidance on rainwater tank design can be obtained from a range of sources including Rainwater Harvesting Australia who publish a [Rainwater Tank Design and Installation](#) and [Rainwater Harvesting: Residential Design Specification](#).

Rainwater tanks must include consideration of the elements listed above and be:

- Sized to have a volume not less than that required by any BASIX Certificate issued for the development or the volume defined in the table above
- Designed and located to capture rainwater from at least 80 per cent of the roof, preferably 100% of the roof
- Designed to supply water to all non-potable uses to ensure year-round demand and minimise potable water drawdown
- Designed to have a 'baseflow' leak, that flows to garden areas of the lot at a rate of 0.33 litres / square metre of a lot / day (and leaks from upstream of the pump, to not increase pump costs and wear and tear)
- Designed and configured to ensure provision of water for all purposes in the event of a power failure or the tank water level falling below a defined level or volume. This may comprise:
 - A bypass mechanism to allow mains water to be used for toilet flushing, site irrigation etc. in the event of power failure disabling the pump (subject to water authority approval). The tank bypass line must incorporate an appropriate backflow prevention device; or
 - A float-valve system (or equivalent) to allow the tank to be filled to a predetermined level when the tank water level fall below a defined volume.

Some examples of rainwater tank installations are shown below.



Wet or charged rainwater tank system, where the rainwater flows down a downpipe, along or under the house, and then up to the rainwater tank. (Coburg, Merri-bek City Council). Source: Wave Consulting Australia.



Simple slimline rainwater tank with 90 mm overflow shown, positioned in corner of the property. (Coburg, Merri-bek City Council). Source: Wave Consulting Australia.

Figure 2. Examples of rainwater tank installations.

7.4 Swales

Swales are common throughout WSC LGA today. While swales are not always vegetated, they form an important conveyance function and filtration function. When grass or other vegetation can grow within the swale, they also serve to slow down the flow, allow sediment to drop out and allow low flows to infiltrate. Over time the vegetation will need to be maintained, and occasionally accumulated sediment removed.

Vegetated swales are usually planted with specific plants to become a landscape feature. They convey stormwater and provide removal of coarse and medium sediment. They are commonly used in conjunction with grassed areas running parallel along the edge of the road also referred to as buffer strips). However, these grassed areas must be greater than two metres wide if they are utilised. WSC requires them **not** to be used with invasive or high maintenance grass species like kikuyu, couch and buffalo. Instead grasses like weeping grass (*Microlaena stipoides*) or demonstrated non-invasive turf grasses such as *Zoysia* spp are to be used. Native groundcovers such as *Dichondra repens* and *Viola hederacea* may also be used, when appropriate.

All design work associated with swales should be consistent with the Wollondilly Shire Council WSUD Standard Drawings.

Vegetated swales are less effective in removing nitrogen from the stormwater than bioretention swales (see section 7.5), as they do not feature the filtering component and convey water on the surface only. Vegetated swales can provide an aesthetically pleasing landscape feature and are relatively inexpensive to construct and maintain. They can be used in median strips, verges, car park runoff areas, parks and recreation areas.

Some design elements that also need to be considered are:

1. Swales are to be designed with an infiltration trench to increase their capacity for conveyance and increase pollution reduction. Swale base to include up to 600 mm depth of 5-7mm screenings to allow infiltration and absorption.
2. Flat curb (or slotted) is required to allow all drainage to flow into median strip. Vegetation must be at least 300 mm offset from curb and 100 mm lower to ensure no build-up of sediment on road
3. Trees are encouraged to provide shade and increase permeability of subsurface
4. Tree species used are to be appropriate for the site conditions and size of infrastructure provided as well as support biodiversity and canopy cover
5. Drainage connections into swale either above or below pavement surface, depending on stage of build and grades
6. For swales adjacent to footpaths, the side slope of the swale must have a maximum grade of 1 in 8 if closer than a metre, or 1 in 3 if more than 1 metre away per AUSTROADS Guide to Road Design Part 6A Figure 5.10

The longitudinal slope of a swale is recommended to be between 1% to 5%, in order to prevent any water ponding or water logging problems on sites.

Design flow rates for swales are noted below, highlighting the benefit that a 'zero impact' method of reducing impervious flows will have on swales and their capacity to manage flows.

AEP	Base case (m ³ / sec)	WSC target that assumes zero impact design of urban development (m ³ / sec)
20 % annual exceedance probability	0.119	0.081
5 % annual exceedance probability	0.169	0.129
1 % annual exceedance probability	0.235	0.197

Time of concentration assumed to be between 5 and 15 minutes for urban catchments in Wollondilly.

The theoretical capacity of a 7 metre wide swale, with a 2 metre base, between a 1% grade and 5% grade, is between 0.973 m³ and 5.844 m³. It is reasonable to suggest that most flows can be managed within a central swale.

For swales on grades greater than 2%, the use of dense vegetation, check dams within the swales and / or drop structures must be used to slow the velocity of flows evenly across the swales. The creation of check dams may be achieved through depressions in the grassed invert level of the channel. A porous base or infiltration trench with perforated drain is required below the check dam area.

A filtration trench or sub-soil drain system is required under the invert level of swales with longitudinal slopes of less 2% to prevent water ponding.

Swales should always be 'U' or spoon shaped to minimise erosion. Vegetation is an integral component of swales since it promotes constant distribution and retardation of flows. Vegetation is required to cover the full width of a swale and be designed to withstand the likely design flows and velocities. The vegetation of the swale must also be of a sufficient density in order to guarantee significant contact between flows and vegetation. No invasive grass species to be adjacent the vegetated swales to prevent excessive maintenance requirements.

See Attachment 11.4.1 for plant species and densities.

If run-off enters a swale as distributed flow (i.e. perpendicular to the main flow direction), the swale batter receiving the inflows acts as a vegetated buffer and can provide an important pre-treatment function for the swale by removing coarse sediment prior to flows concentrating along the invert of the swale.

Additional advice re the construction and establishment of a swale can be found at the Water by Design guidelines <https://hlw.org.au/download/water-by-design-construction-and-establishment-guidelines-swales-bioretention-systems-and-wetlands/>.

As previously mentioned, all design work associated with swales should be consistent with the Wollondilly Shire Council WSUD Standard Drawings.

Some examples of swale installations are shown below.



Central median swale with trees (Zetland, City of Sydney). Source: Wave Consulting Australia.



Central median swale with trees (The Oaks, Wollondilly Shire Council). Source: Wave Consulting Australia.



Swale with dense undergrowth (Meadowbank, City of Campbelltown). Source: Wave Consulting Australia.



Central median swale with cascated kerbs (City of Sydney). Source: Wave Consulting Australia.



Simple rock lined swale (Mornington Peninsula). Source: Wave Consulting Australia.



Swale adjacent to car park (Logan City Council) Source: Water by Design, Jack Mullaly.



Bioswale alongside street, with rock inlet to manage scouring (Redfern, City of Sydney). Source: Wollondilly Shire Council.



Bioswale alongside street (long view), with rock inlet to manage scouring (Redfern, City of Sydney). Source: Wollondilly Shire Council.

Figure 3. Examples of swale assets.

7.5 Bioretention / raingardens

Bioretention systems are also sometimes referred to as raingardens. They are commonly used in Sydney to meet stormwater quality targets. Bioretention systems are vegetated sandy soil media filters, which treat stormwater by allowing it to pond on the vegetated surface, then slowly infiltrate through the sandy soil media. Treated water is captured at the base of the system and discharged via outlet pipes.

All design work associated with bioretention systems/raingardens should be consistent with the Wollondilly Shire Council WSUD Standard Drawings.

Some design elements that also need to be considered are:

1. Runoff and associated pollutant concentrations into raingardens assumed to be from 'mixed urban area'
2. Inlets to raingardens must have flow interceptor to reduce velocities and capture sediment. 450 x 450 mm sediment trap is ideal (with permeable base to reduce standing water)
3. Filter media must have between 180 mm / hour and 300 mm / hour infiltration capacity
4. For vegetation density suitable for bioretention assets, see Attachment 11.4.2 for details
5. The addition of street trees in the middle of the garden bed, that will increase infiltration rates and increase nutrient removal, but must be located in appropriate location and not impede lines of sights
6. Overflow to allow bypass of events greater than 3 months average recurrence interval (ARI). Extended detention of minimum 200 mm. Levels to be checked to ensure all batters are above overflow level
7. Underdrain is present and connected to outlet / overflow pit
8. No liner is recommended on the base. Lines can be used near existing assets such as road pavements as per Standard Drawings 21 and 22
9. Submerged zone acts to allow for some retention and water availability for vegetation over dry periods, and would typically be 300mm deep
10. Outflow to waterways or other WSUD asset

Bioretention systems can be implemented in almost any size/shape in many different locations including street trees in the footpath, traffic calming devices within streetscapes or larger, end of line basins. It is important to have sufficient depth (normally at least 0.6 m) between the inlet and outlet of a bioretention system.

Therefore, they may not be suitable at sites with shallow bedrock or other depth constraints. However, they are otherwise a very flexible and effective treatment measure for both suspended and dissolved pollutants.

A wide range of vegetation can be used within a bioretention systems allowing them to be readily integrated into the landscape of an area. The main consideration is whether the plants like to grow in sandy, well drained soils and whether they can survive potential long dry spells in summer and wetter feet in winter. Incorporating a sump into the base of the bioretention system or having stormwater harvesting systems like rainwater tanks 'leak' into these systems can reduce the length of dry period. See Attachment 11.4.2 for plant species and densities.

Bioretention swales (or bioretention trenches) are located within the base of a swale. They provide both a conveyance function for stormwater and treatment through filtration, extended detention and some biological uptake. Bioretention swales are suited to commercial precincts or car parks as they can be easily incorporated into landscaped areas without impacting on development opportunities. They can provide attractive landscape features in an urban development and are commonly located in the median strip of divided roads. Swales can often be used as an alternative to a conventional pipe system, resulting in construction cost reductions.

Bioretention basins are suitable at a range of scales and shapes and, hence, provide a flexible treatment measure. They can be positioned at regular intervals along streets to treat runoff prior to entry into an underground drainage system or be located at drainage system outfalls to provide treatment for larger areas. However, large basin can become difficult to manage and therefore they should not be larger than 500m² in area. Bioretention systems are often more effective in removing Nitrogen than conventional wetlands and can therefore be a practical alternative where land for a treatment system is limited.

For further references for the design and construction guidance, please refer <https://watersensitivecities.org.au/content/stormwater-biofilter-design/> and <https://hlw.org.au/download/bioretention-technical-design-guidelines/>

A bioretention system must meet these criteria:

- **Vegetation** minimises surface clogging and assists in pollutant removal via biological processes. A greater than 95% plant coverage is required after 2 years of establishment. See Attachment 11.4.2 for details regarding plant species and densities. Appropriate shrubs or trees may be included. No invasive grass species to be adjacent bioretention and raingarden systems to prevent excessive maintenance requirements.
- **Extended detention depth (EDD)** of minimum 200mm stores stormwater temporarily on the surface to buffer flows so that a greater volume can be treated.
- The **filter media** is the principal treatment zone. As stormwater passes through the filter media, pollutants are removed by filtration, adsorption and biological processes. The filter media should normally be 0.6 m deep, and 0.3 m is the minimum acceptable depth where the site is constrained. The filter media should be a loamy sand with a permeability of 180-300 mm/hr under compaction and should be clean and free of weeds. The filter media should contain some organic matter (less than 5%) but be low in nutrient content. No fertiliser is to be added.
- A submerge zone should be included to allow for water retention between rain events and the wicking of moisture up through the soil profile to water the plants, particularly in dry periods.
- The Filter Media, transition layer and drainage layer shall meet the specifications defined in *Adoption Guidelines for Stormwater Biofiltration Systems (Version 2) – Appendix C Guidelines for filter media in stormwater biofiltration systems 2015*.
- An **impervious liner** may be required to prevent infiltration into surrounding soils, particularly if the treatment system is immediately adjacent to roads or buildings where infiltration may cause structural issues. Note that geotextile filters should not be used within the bioretention system, as they are

prone to clogging. If perforated pipes come with a geotextile sock, this should be discarded before installation.

- The **inlet** should be designed to protect capture sediment and litter and protect the surface of the bioretention system from scour and erosion.
- **Pre-treatment** is recommended when sediment loads are likely to be high, or if there is a risk of spills. The simplest option is to incorporate a pit with a sump immediately upstream of the bioretention system. (see the Blacktown standard drawing for bioretention systems).
- **Inclusion of an overflow pit** (or other controlled overflow point) to allow high flows, beyond the capacity of the treatment system, to escape to the stormwater drainage system in a controlled manner.
- A **flushing point** connected to the perforated pipes in the drainage layer, so they can be cleaned in the event of blockage.
- **Edge treatment** (e.g. a raised kerb or series of bollards) may be required to protect the bioretention system from traffic.
- **Submerged zone.** A submerged zone creates a storage reservoir for the plants to access in between rainfall events and supports a greener and cooler microclimate. The bioretention guidelines (Payne et al, 2015, describes the benefits of this aspect of the design: *“A submerged zone in the lower biofilter layers increases moisture availability to plants, thereby increasing their drought resilience and better sustaining biofilter function in the long-term. The benefits of retention within a submerged zone for pollutant removal have been clearly demonstrated, particularly for nitrogen and pathogen removal. It also provides hydrological benefits. If the system is unlined with a raised outlet, the submerged zone will be temporary, and exfiltration will be promoted.”*

Some examples of bioretention asset installations are shown below.



Raingarden installed in nature strip (Coburg, Merri-bek City Council). Source: Wave Consulting Australia.



Raingarden installed in nature strip (Coburg, Merri-bek City Council). Source: Wave Consulting Australia.




Raingarden installed in dividing strip (City of Kingston).
Source: Wave Consulting Australia.



Raingarden installed in nature strip (Malvern East, City of Stonnington). Source: Wave Consulting Australia.



Above ground raingarden (aka WSUD Planter box). (Coburg, Merri-bek City Council). Note – local native species like *viola hederacea* would be more suitable for these systems in Wollondilly Council. Source: Aqua Build Manufacturing.

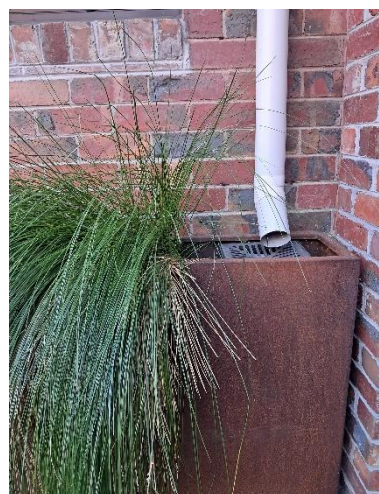

Above ground raingarden (aka WSUD Planter box).
Source: Aqua Build Manufacturing.

Figure 4. Examples of bioretention asset installations.

7.6 Tree pits

Tree pits typically suited to streetscape design in highly urbanised areas. The street tree is lowered to allow stormwater runoff to enter the tree pit and filter through the vegetated media before being discharged into the stormwater system.

Raingarden tree pits have similar design and operational principles as other raingardens including the use of specific soil media. The key differences are:

- Vegetation selection (i.e. the tree species)
- Smaller footprint
- Structural soil properties (media)
- Landscape finishes

Like a raingarden, the tree pit filters stormwater runoff through the vegetated filter media. Temporary ponding above the filter media provides additional treatment within a small space. An extended detention depth (EDD) is needed. Importantly for rain garden tree pits, the tree must be set down, typically below the invert of the kerb.

All design work associated with tree pits should be consistent with the Wollondilly Shire Council WSUD Standard Drawings.

Some design elements that also need to be considered are:

1. Runoff and associated pollutant concentrations into tree pit assumed to be from 'mixed urban area'. Kerb acts as overflow system
2. Overflow from private property can also be drained to tree pit
3. Soil media as per ***Adoption Guidelines for Stormwater Biofiltration Systems (Version 2) – Appendix C Guidelines for filter media in stormwater biofiltration systems 2015***
4. Submerged zone should be present to support tree growth
5. Drainage / trench runs parallel to road and enables distribution of water to tree pits downstream
6. Tree species as per species list
7. No liner is recommended for tree pits

Key design issues

The top of tree media surface layer should be set a minimum of 50mm and ideally 100mm below the invert of the slot cut in the kerb and channel. This allows for the extended detention depth (EDD) around the tree.

Also consider the relationship with surrounding infrastructure including:

- Road surface grading (selection of either single cross fall or crowned road)
- Location of street trees to integrate with existing stormwater infrastructure, in particular:
 - location of stormwater pits
 - levels at the road surface
 - levels for the stormwater lines that will receive treated water from street tree drainage.
- Identification and location of services (gas, electricity (underground and above ground), telecommunication, water and sewerage).

Inlet design is particularly important. The inlet should be clear and wide allowing maximum inflow of water. This will bring in litter and sediment as well, which requires cleaning. Many systems have been developed to minimise the entry of litter using grills and screens. However, these all block within a year as sediment builds up behind the screens and is difficult to clean. Once the sediment builds up, the stormwater bypasses the tree pit hence making the WSUD design useless.

High flows will be bypassed once the tree pits EDD is full. Stormwater will back up out of the tree pit back to the gutter and continue downstream. A standard drainage side entry pit should be provided at the end of the street.

Typically, a perforated pipe is incorporated into the design to provide underdrainage. The underdrainage is connected to the conventional drainage system. This ensures treated stormwater is conveyed to the receiving waterways and prevents waterlogging the tree. One end of the underdrainage is exposed to allow periodic flushing, if required.

The selection of the tree species requires consultation between Council's Tree Management Officer, landscape architect, arborist and WSUD specialist. Use expert advice to assess the suitability of tree species to the raingarden tree pits. Suitability depends on:

- Root structure
- Climatic condition
- Interaction with surrounding infrastructure
- Compliance with Council's Tree Management Policy

Safety considerations

Raingarden tree pits must be set below the kerb invert and the design must also integrate pedestrian safety. Examples of designs incorporating safety measures include:

- Concealment of extended detention depth with frame and pit lid
- Integration of landscape design with retaining wall
- Use of pebble mulch
- Installation of a handrail

Openings in pit lids around tree trunks must not be less than 0.75m in diameter. Grates should be provided over the openings to prevent human injury. Concentric rings can be used and cut out sequentially to provide more room as the tree grows.

In time the tree will outgrow the pit structure. Thoughts should be given to how the pit will be adapted to this condition in 10-15 years' time.

Some examples of tree pit installations are shown below.



Tree pit installation with no ground cover. Castellated kerb used to allow multiple water inlets. This asset could benefit from increased ground cover to reduce urban heat, and increase evapotranspiration. (City of Hobsons Bay) Source: Wave Consulting Australia.



Tree pit installation with overflow pit in wrong location, as most runoff into the asset will go to the pit before the tree. (City of Hobsons Bay) Source: Wave Consulting Australia.

Figure 5. Examples of tree pit installations.

7.7 Infiltration trenches

An infiltration trench is an excavation filled with porous material such as rock screenings. Stormwater is directed into the trench through a primary filter that retains sediment, litter and organic matter. The collected stormwater is utilised by vegetation grown in or around the trench and infiltrates into the surrounding soil.

Infiltration systems can be configured in a variety of ways and range from simple gravel-filled trench systems to those topped with bio-retention systems for maximum pollutant removal prior to infiltration.

Infiltration trenches can increase the soil water levels and groundwater flow rates, as well as reduce stormwater flow velocities. Their ability to remove particulate and dissolved pollutants depends on local soil geochemistry, treatment measure configuration and grading.

Infiltration trenches are suitable for passive irrigation of streetscape trees and vegetation. They can also be used in nature strips and medians to lose the “leaky” discharge from rainwater tanks.

To reduce their visual impact, they can be covered with a layer of fibre fabric and finished with a shallow layer of topsoil and grass. The trench should be lined with a layer of geotextile fabric, to prevent soil migrating into the rock or gravel fill.

Similar to an infiltration trench, the current WSC subdivision and Engineering Standards allow for an on-site absorption trench to be installed if a single dwelling house on existing lots cannot pipe runoff to the street or does not have access to a suitable inter-allotment drainage easement. These allotments can discharge stormwater to an onsite absorption trench provided a grassed area is available and:

- it is equal to the total plan area of all roofs and hard surfaces on the site,
- it is suitably located for the purpose, and
- the soil type is suitable for the purpose.

Newly created lots are currently not be permitted to dispose to an onsite absorption trench unless they are greater than 4,000 m².

An onsite absorption trench should be a minimum of 6.0 metres long, 0.6 metres wide and 0.6 metres deep. It should be sited parallel to the contours, as far as practicable from the property boundaries and a minimum of 3.0 m from buildings. It should not be placed under any paved surface and should be at least 1.0 m from pavements subject to vehicular traffic. The trench is to be principally in accordance with the design elements listed below.

All design work associated with infiltration trenches should be consistent with the Wollondilly Shire Council WSUD Standard Drawings.

Some design elements that also need to be considered are:

1. Runoff and associated pollutant concentrations into infiltration trenches assumed to be from 'mixed urban area'. High flow overland bypass also important to include at inlet structure
2. Porosity of filter media must be > 50% (using particle sizes > 15 mm)
3. Vegetation density of 6-8 plants / m² appropriate see Attachment 11.4.2 for details
4. Overflow must have capacity for 20% Annual Exceedance Probability (AEP) flows and above
5. Liner is recommended on sides of trench if adjacent to road infrastructure
6. Overflow & outflow to local swales and overland flow paths, or other WSUD asset
7. Shrubs and trees appropriate to increase evapotranspiration (see Attachment 4 – Plant species and densities 11.4 for species list)

Some examples of infiltration trench installations are shown below.



Infiltration trench in open space, prior to backfilling. (Yardley, PA, USA) Source: Sean Markee - SRM Contracting



Infiltration trench prior to top soil, with geofabric wrap. Note other liner and aggie not shown after the back filling is complete. Source: Wave Consulting Australia.

Figure 6. Examples of infiltration trench installations.

7.8 Constructed wetlands and sediment ponds

Wetlands, sediment basins and ponds are often combined to provide an aesthetic feature to an urban development that meets the stormwater quality outcome as well as providing recreation and biodiversity values. Wetland systems, although they take more land area than bioretention systems, sit well in the rural landscape of Wollondilly and can be a feature of any development.

All design work associated with constructed wetlands and sediment ponds should be consistent with the Wollondilly Shire Council WSUD Standard Drawings.

Some design elements that also need to be considered are:

1. Inflows from urban area assumed be from mixed urban area. Inflows intercept and divert stormwater drainage, not natural flows. Wetlands are to be located as 'offline systems'
2. High flow bypass is ideal to prevent scouring of system
3. Sediment basin typically 10% of wetland area
4. Macrophyte zone with depths varying between 100 mm and 700 mm
5. Natural water level varies by 500 mm (referred to as the extended detention)
6. Overflow should have gate system to allow for draining for maintenance
7. Reuse of treated water could be transferred to storage pond
8. Flows reconnect with high flow bypass to continue downstream
9. Amenity and canopy cover around wetlands are encouraged
10. Harvesting from constructed wetlands is appropriate in reducing overall volumes of water flowing to waterways. These can be inground storage ponds (with appropriate circulation) or above ground tanks. Storage ponds can be above or below ground, or an adjacent pond.

, to the constructed wetland are shallow, extensively vegetated water bodies, that remove pollutants through enhanced sedimentation, fine filtration and pollutant uptake processes. Stormwater runoff is passed slowly

through the vegetated areas, which filter sediments and pollutants, and biofilms establish on the plants and plant roots, which absorb nutrients and other contaminants. Wetlands are well suited to treat large volumes of stormwater runoff and have the advantage of improving local amenity and providing habitat diversity.

Key design issues to consider include; verifying the size and configuration for treatment; determining design flows; incorporating gross pollutant traps upstream to minimise floating litter; well-designed inlet zone (see sedimentation ponds); layout of the macrophyte zone; hydraulic structures; selecting plant species and planting densities and providing maintenance access.

See Attachment 11.4.3 for plant species and densities. No invasive grasses adjacent planted riparian zones. To be separated using methods such strategic footpath positioning to create a barrier preventing invasive grass from entering planted zones.

Sedimentation ponds can be used on their own or as the first pond in a wetland treatment system. Sedimentation ponds serve to remove coarse to medium sized sediments (typical target size of particles is 125 µm or larger). They facilitate the settling of particles through temporary detention and the reduction of flow velocities. These accumulated sediments require removal by excavation every 5-10 years. Facilitating this access needs to be carefully considered to balance aesthetics and maintenance practicalities. Determining the size of a sedimentation pond is also crucial to:

- Prevent smothering of downstream treatment measures (if the sediment basin is too small)
- Avoid the accumulation of smaller particles of higher contaminant concentrations (in the case of over-sized basins), and
- Prevent the need for frequent desilting.

Ponds and shallow lakes can form the final stage of a treatment train. It is not recommended that they be used as a stand-alone measure to meet stormwater quality targets. Ponds promote particle sedimentation, adsorption of nutrients by phytoplankton and UV disinfection. They can also double as storage facilities for reuse schemes, recreation features and wildlife habitats. Often wetlands will flow into ponds although they can exist independently in areas where wetlands are unfeasible for example in steep terrain.

Some developers have modified wetland designs to increase surface areas and allow for exfiltration from the water body to reduce overall runoff volumes. Care needs to be taken to verify that the exfiltration rates, and the variable surface level. Consideration also needs to be given to increased water temperatures and algal/aquatic weed growth resulting from large shallow water bodies.

For further detail see the following references for design and construction guidance:

- Blacktown City Council, 2020. WSUD developer handbook. MUSIC modelling and design guide 2020.
- Design, construction and establishment of constructed wetlands: design manual, Melbourne Water <https://www.melbournewater.com.au/planning-and-building/developer-guides-and-resources/standards-and-specifications/constructed-0>
- Shallow Lake Systems Design Guidelines for Developers, Melbourne Water, Nov 2005
- <https://www.melbournewater.com.au/media/607/download>
- Constructed Wetlands Manual, Department of Land and Water Corporation, 1998 <https://www.shop.nsw.gov.au/publication/constructed-wetlands-manual-19>
- Wetland Technical Design Guidelines, Healthy Land and Water, 2019
- <https://hlw.org.au/download/wetland-technical-design-guidelines/>

The design and construction of a wetland systems should follow the guidance provide in the above listed references. The Healthy Land and Water's Wetland Technical Design Guidelines and Melbourne Water's Constructed wetlands design manual have detail design requirement for optimal wetland function.

Key considerations include:

All wetlands, sediment basins and ponds must be located off-line of any waterway. Ideally, they would be co-located with open space and consideration should be given to harvesting and reuse of the stormwater.

All drainage lines and pipes must be pre-treated with a Gross Pollutant Trap (see section 8.8) followed by a sedimentation basin/pond unless the contributing catchment is less than 5%.

Sedimentation basins should:

- Be sized to capture 90% of 125µm particles from the 1 year Average Recurrence Interval (ARI) flow event.
- Have a typical depth of 1.5 to 2 m.
- Provide adequate sediment storage volume to store five years of sediment. The top of the sediment accumulation zone must be assumed to be 500 mm below normal Water Level (NWL).
- Ensure that velocity through the sediment basin during the peak 100 year ARI event is ≤ 0.5 m/s. (The flow area must be assumed to be the EDD multiplied by the narrowest width of the sediment pond, at NWL, between the inlet and overflow outlet).
- Restrict the Extended Detention Depth (EDD) to ≤ 350 mm.
- Include a high flow bypass weir (or 'spillway' outlet structure) to deliver 'above design' flood flows to the high flow bypass channel.
- Access must be provided to sediment basin, around perimeter of wetland and to all hydraulic structures to allow for maintenance.
- Public access should be restricted by dense planting minimum 2m wide and 1:5 slope or use pool fencing when batters are steeper. If bordering private lots solid steel panel fencing must be used at the boundary.
- Be able to be drained whilst maintaining the macrophyte zone of the wetland at normal water level.

Constructed Wetlands designs needs to consider the following:

- At least 80% of the area of the macrophyte zone at NWL must be ≤ 350 mm deep to support shallow and deep marsh vegetation. The wetland bathymetry should provide approximately equal amounts of shallow marsh (100mm - 150 mm deep) and deep marsh (150 mm to 350 mm deep).
- The length of the macrophyte zone must be $\geq$ four times the average width of the macrophyte zone.
- The macrophyte zone EDD must be ≤ 350 mm.
- The macrophyte zone outlet structure needs to be designed to provide a notional detention time (usually 48 to 72 hours) for a wide range of flow depths. The outlet structure should also include measures to exclude debris to prevent clogging.
- Outlet structures must be easily identifiable and maintainable. They must be accessible from the bank. The edge of the outlet structure closest to the bank (maintenance access point) must be located in < 350 mm water depth.
- Connecting pipework between cells, and the base of each cell must be graded to drain to a low point. The low point should contain a submerge outlet controlled by a valve to allow the complete system to be drained for maintenance and establishment purposes.
- Be designed to convey the maximum overflow from the sediment basin (typically >1 year ARI).
- The public safety requirements for individual wetlands will vary from site to site and requires careful consideration. However, a gentle slope to the water's edge and extending below the water line must be adopted. The maximum batter slope for constructed wetlands should be 1 in 8 (Vertical: Horizontal).
- Vegetation has an important functional role in treating stormwater flows as well as adding aesthetic value. Dense planting of the wetland edge will inhibit public access, minimising potential damage to wetland plants and reducing the safety risks posed by water bodies. The planting densities should ensure that 70 - 80 % cover is achieved within two growing seasons (2 years).

- If these planting densities or better cannot be achieved consideration to the use of pool fencing may be given.
- If the asset borders a private lot solid steel panel fencing must be used at the boundary.

Minimising the breeding potential of mosquitos is an important factor for wetland design and management. The following aspects should be considered during design and construction:

- Access for mosquito predators such as frogs, fish and predatory insects, to all parts of the water body (avoid stagnant isolated areas of water).
- Provision for a deep sump of permanent water (for long dry periods or for when water levels are artificially lowered) so that mosquito predators such as frogs may seek refuge and maintain a presence in the wetland.
- Maintaining natural water level fluctuations that disturb the breeding cycle of some mosquito species.
- Wave action from wind over open water will discourage mosquito egg laying and disrupt the ability of larvae to breathe.
- Providing a bathymetry such that regular wetting and drying is achieved, and water draws down evenly so isolated pools are avoided.
- Providing sufficient gross pollutant control at the inlet such that human derived litter does not accumulate and provide breeding habitat.
- Ensuring overflow channels don't have depressions that will hold water after a storm event.

WSC will not accept islands (or floating wetlands) within wetlands as they are difficult to maintain (need a canoe or boat) and can become easily overgrown with weeds.

Some exemplar examples of a wetland are Sydney Park and Blacktown Showgrounds.

Again, it is important that all design work associated with constructed wetlands and sediment ponds should be consistent with the Wollondilly Shire Council WSUD Standard Drawings.

Some examples of constructed wetland and sediment pond installations are shown below.



Wetland with healthy aquatic plant coverage, and nearby landscaping (City of Brimbank). Source: Wave Consulting Australia



Wetland with healthy aquatic plant coverage, and nearby landscaping (City of Stonnington), post a sediment clean out. Source: Wave Consulting Australia



Wetland at Sydney Park (City of Sydney). Source: Landscape Performance Series, Simon Wood Photography

7.9 Fixtures and water efficient options

Water efficiency within buildings should be implemented in line with BASIX and green star rating requirements. Water efficient fixtures and appliances are readily available and not only save water, they save energy and cost by reducing the amount of hot water used. Solar heated hot water systems are also encouraged.

WELS ratings for appliances in residential and office environments are recommended to be as follows:

- Showers – 4-star WELS rating
- Toilets – 5-star WELS rating
- Washing machines – 5-star WELS rating

8 Planning, design, & construction process

8.1 Works Adjacent Waterways

Water Sensitive Urban Design and stormwater management should be considered at the outset of a development including management from a regional context rather than a site by site basis. New developments are to complement neighbouring and adjoining infrastructure and environmental features. Contours, depressions, ephemeral and first order streams should be identified and used to guide the layout of the development. Retention of first and second order streams will go a long way to mitigating the impact of any development on the Nepean and Hawkesbury Rivers.



WSC encourages developers to follow the following stages in developing their approach to stormwater management.

Development within 40 metres of watercourses requires a Controlled Activity Approval and is subject to conditions and approval by NSW Natural Resources Access Regulator (NRAR) Council may still deem a natural drainage feature not recognised by NRAR as a first order stream, to be retained and not redirected. Council may request environmental restoration works of these natural drainage features including revegetation.

Riparian width requirements need to be consistent with land identified as “sensitive land” on the Natural Resources—Water Map.

8.2 Early Planning – knowing your site and your requirements

The early planning phase is important to establish site characteristics, WSUD targets and preferred WSUD assets types for a project. The WSUD targets should align with overall council strategies.

The early planning phase should also be used to consider any constraints that may arise through the design, construction and maintenance phases. Council and NSW state government authority’s expectations for each project should also be clearly established during the early planning phase. These expectations can be determined through the published documents such as strategic and master plans for the location, DCP, LEP’s and guidelines such as this one. If necessary, an early planning meeting can be requested with council.

Your early planning should include:

- 1) Details of the preliminary site assessment that covers:
 - a) Location
 - b) Type of development (e.g. residential, industrial, etc.)
 - c) Area and number of lots
 - d) Development density
 - e) Proposed outfall / Discharge locations
 - f) Proposed extent of WSUD (indicative only)
 - g) Potential site constraints
 - h) Environmental considerations (terrestrial and aquatic habitat identified of biodiversity significance)

- i) Cultural significance and Caring for Country principles considered (e.g. waterway corridors)
- 2) Council, Sydney Water, Office of Environment and Heritage, EPA and other authority expectations.
- 3) Precinct Structure Plan and other regional planning requirements.
- 4) A WSUD strategy and targets that meets the published expectations, and may include:
 - a) Reducing runoff and inundation
 - b) Reducing Directly Connected Imperviousness (DCI)
 - c) Stormwater treatment targets
 - d) Water conservation
 - e) Maintaining environmental flows
 - f) Improving the local environment and landscape
 - g) Community benefits (such as high quality recreation areas)
 - h) Other council specific targets or strategies
- 5) The preferred WSUD asset types and distribution of systems should be considered based on recommendations with these WSUD guidelines and any published strategies and targets. The WSUD system/s may consist of one treatment type or a treatment train of multiple assets to meet these targets. Note that council may not support the use of all WSUD asset types, due to their unsuitability for local topography, maintenance or safety requirements.
- 6) Design requirements should be considered early in the planning phase to identify the general design strategy and potential design consideration, assisting the later design phase. These include; site constraints, integrating WSUD with existing drainage systems, requirements for smaller development sites, and requirements for sites upstream and downstream.
- 7) Preliminary construction, operations and maintenance requirements or principles should be considered in the planning phase. It is important to consider these factors in the planning phase to ensure council requirements can be met and to assist with the later project phases.
- 8) Funding opportunities – from within council or external support (e.g. private sector, government grants or State Government programs).


8.3 Concept Design – objective of and submission to council requirements

A concept design is to be developed based on the required WSUD targets, the appropriate WSUD assets, and the results of the site assessment. The concept design should also consider other design considerations, such as:

- **Multiple WSUD benefits** – design WSUD systems to achieve multiple stormwater benefits, such as stormwater treatment, stormwater retention as well as water conservation and demand management.
- Consider if other benefits can also be achieved through the stormwater design, such as high quality open space for communities.
- **Flooding** – develop designs to minimise local inundation.
- **Environment** – consider if WSUD can protect and enhance the environment.
- **Cultural heritage** – determine if a cultural heritage assessment is required.
- **Climate change** – consider the impacts that climate change may have on a system, and if these need to be accounted for in the design.
- **Community** – consider opportunities for community engagement and education, such as signage, designing WSUD systems to be a community feature, or information sessions and community meetings.
- **Preliminary construction and maintenance considerations.**

Concept design options should be modelled to check if the proposed concept meets the required WSUD targets.

Designs are typically modelled using the Model for Urban Stormwater Improvement Conceptualisation (MUSIC) for larger developments.

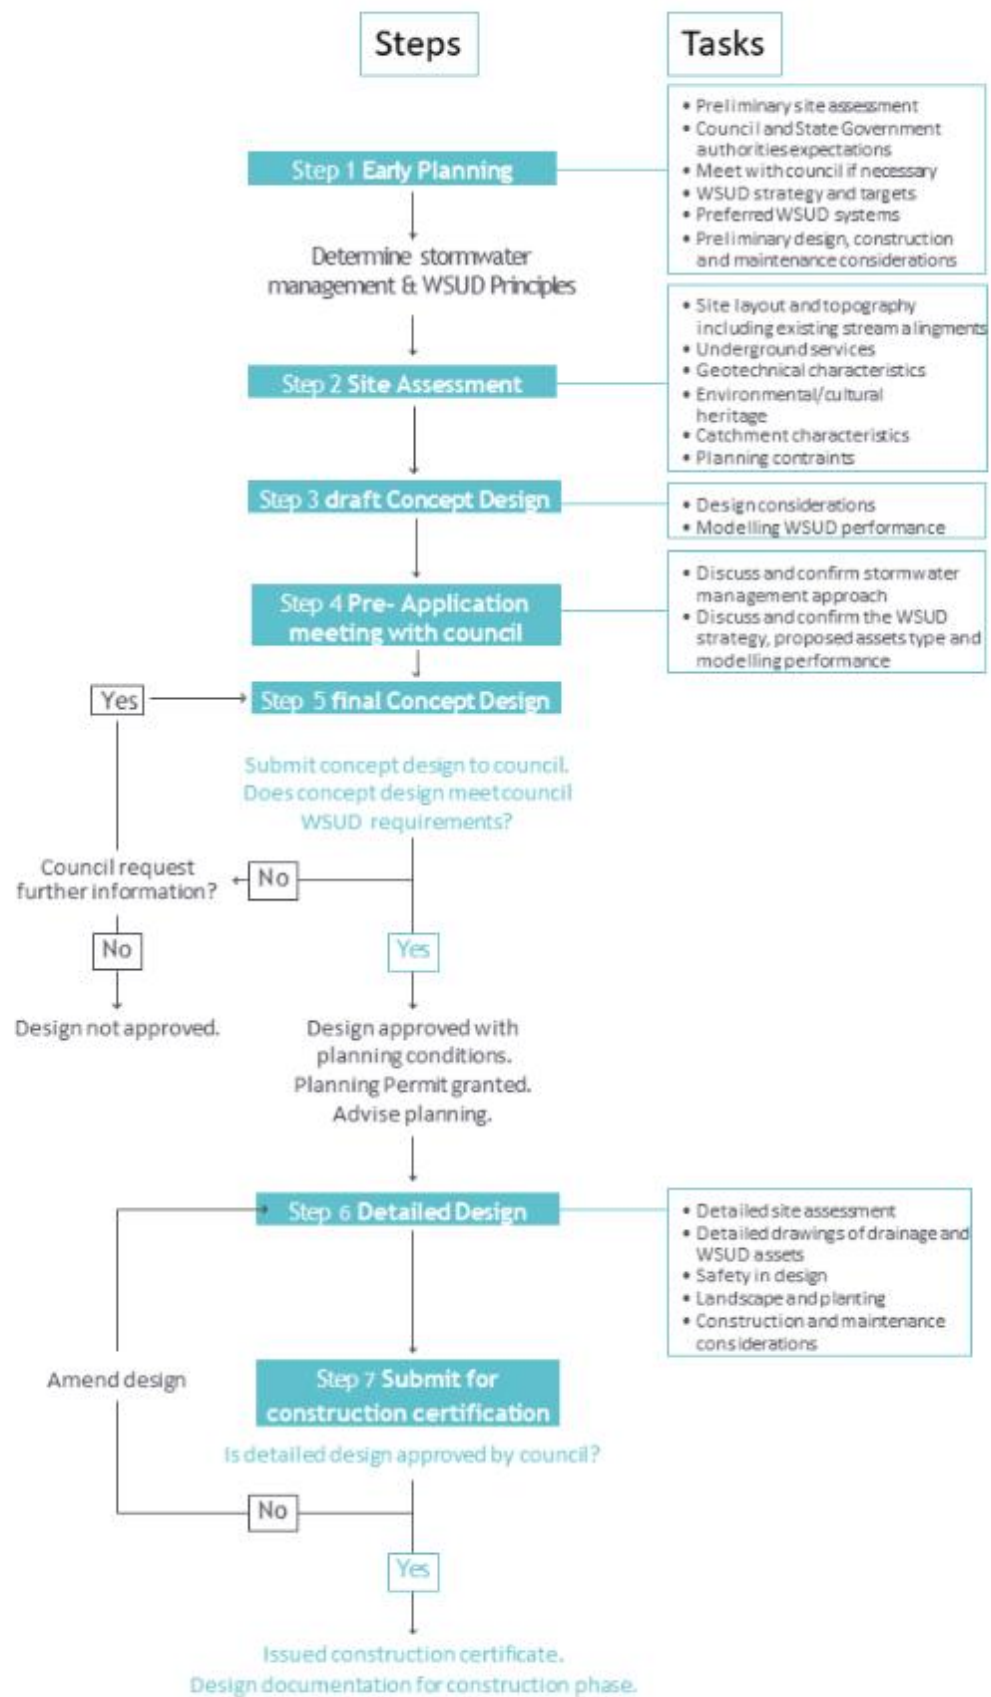

8.4 Submission of the Concept Design

Proponent are encouraged to check the WSC website for the current [Development Application Guide](#) and [Development Application Checklist](#). A pre-application lodgement meeting with council is highly recommended. A WSUD specific DA application checklist is provided in Attachment 1 - Development Application Checklist (lodged with DA).

8.5 Detailed Design

The detailed design can begin upon receiving DA approval based on the approved concept design. The detailed design will include the development of detailed design drawings, a design report as well as other design documentation.

The detailed design must refer to and use the Wollondilly Shire Council WSUD Standard Drawings.

There are several other factors that also need to be considered for each WSUD design.

Safety in design must be addressed for all WSUD designs. Safety considerations may include:

- Site access (for construction and maintenance) – for staff and machinery/vehicles
- Safety considerations during construction
- Public access and educational signage (see Section 308.12 on signage)
- Appropriate signage to identify risks (for example deep water, use of recycled water, confined spaces etc.)
- Batters and requirements for open water (refer to the guidance material provided in Section 7.1 and the [Royal Life Saving Guidelines for Water Safety – urban Water Developments](#))
- Batters for maintenance – steepest 1 in 5.
- Risks of using recycled water, refer to [NWQMS Australian Guidelines for Water Recycling: Managing Health and Environmental Risks \(Phase 2\) – Stormwater Harvesting and Reuse \(2009\)](#)
- Flood depths and velocities
- Locations of existing services
- Proximity to footpaths/pedestrian areas

Landscape and planting plans are to be included with the detailed design. Vegetation type and planting style should be chosen based on:

- WSUD asset type and treatment requirements (refer to the design guidance material reference n section 7)
- Council requirements
- Local environment and native vegetation
- Requirements for erosion control
- Vegetation that can be easily maintained.
- Supporting local biodiversity, amenity and community liveability.
- See Section 11.4 for more information on plant species selection.

Construction phase requirements can be specific for different WSUD asset types. However, there are some requirements that should be considered for all WSUD projects, and documented as part of the design documentation including:

- Planting – best conducted during autumn months. However, the timing of planting also depends on adequate water availability, adequate by-pass of high winter flows, and the schedule for the development.
- A detailed Site Environmental Management Plan (SEMP) should be submitted with the design documentation.

- Silt and sediment management is critical in this phase. Please refer to the 2024 version of “Guidelines for erosion and sediment control on building sites” (NSW Department of Planning, 2024), also known as the ‘Blue Book’
- Preferred site access (for staff and machinery/vehicles)
- Asset protection measures
- Areas for stockpiling cut and fill
- Defect liability periods

Maintenance phase requirements

The following items should be considered during the design phase. Documentation indicating how these items have been addressed will be required as part of the Detailed Design documentation.

- preliminary maintenance plans: responsibilities, requirements, clearly locating assets to be maintained and indicative costs
- asset handover arrangements, where appropriate, including defect liability and timeframes
- maintenance access for staff and vehicles/machinery: considering required maintenance frequency, if ‘all weather’ access is required, safety requirements, environmental impacts of access tracks, and aesthetics of the overall system.

Designs should also consider any council specific maintenance and handover requirements and the on-going maintenance activities for specific treatment types.

Examples of maintenance plans can be found in the referenced design document in Section 8 or similar document such as the WSUD maintenance guideline at <https://www.melbournewater.com.au/planning-and-building/stormwater-management/maintenance>.


8.6 Submission of the detailed design

Proponent are encouraged to check the WSC website for the current [Development Application Guide](#). A Subdivision Works Certificate must be applied for and issued before construction works can commence on site. A WSUD specific CC application checklist is provided in Attachment 2 - Construction Certificate Application Checklist (lodged with CC).

8.7 Sediment control during construction

Sediment control is vitally important, especially during the construction phase of a development. As noted above, the main reference is the “Guidelines for erosion and sediment control on building sites” (NSW Department of Planning, Housing and Infrastructure, 2024). Another good reference is the Urban Water Recourse Centre’s Water Sensitive Urban Design: Basic Procedures For ‘Source Control’ Of Stormwater by John Argue et. al. February 2013 reference North American literature that equate sediment production as follows:

- **Atmospheric sedimentation** approximately 20 m³ per km².
- **Sediment supply from a fully-established suburb:** From 10 m³ per km² per annum to 50 m³ per km² per annum.
- **Sediment supply from suburb during construction phase:** From 7,000 m³ per km² per annum to 20,000 m³ per km²

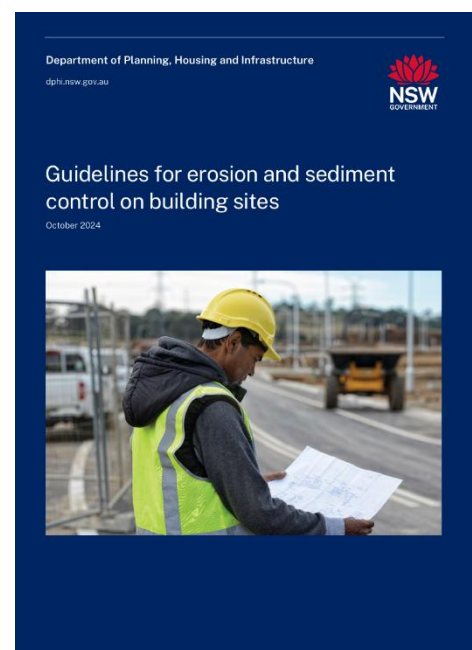

per annum. The observed sedimentation rate for small sites is even higher and corresponds to 25 – 45 m³ per 'quarter-acre' block (1,000 m²) per annum.

Sedimentation during construction is significantly higher than in established suburbs.

Sediment and erosion control measures requirements can be found in WSC construction specification 2016 section C211.

8.8 Construction and maintenance

During the construction phase, bioretention systems should be protected from high sediment loads associated with construction on site (erosion and sediment control measures should be in place to manage stormwater during this phase).

The commission of bioretention / raingardens systems should not proceed or be brought online until the civil works are completed and the catchment is stable (i.e. at least 80% of the housing construction is finished). Prior to this it should be used as a sedimentation device to manage the unstable upstream catchment.

Regular maintenance is important to ensure the ongoing performance of bioretention systems. Maintenance requirements of bioretention systems include:

- Monitoring for scour and erosion,
- Regular (3 monthly) removal of litter and sediment build-up
- Weed removal and plant re-establishment
- Monitoring overflow pits for structural integrity and blockage.

8.9 Construction Phase – Inspection of WSUD Assets

The developer must permit adequate access for inspection by a Council Officer during the construction. Specifically, for WSUD measures, inspection of any buried or hidden element is important before backfilling or placement of media to check the general locations and sizing of associated piping, protection systems (e.g. overflows, backflow, first flush), storage, and any other hidden elements. Connection to Council's pipelines and underground infrastructure shall also be inspected by a Council Officer.

Final inspection shall be carried out by the accredited certifier, prior to issuing the relevant Compliance Certificate and shall include checking that:

- Pits, pipes, basins, filtration systems etc are clean and free draining,
- Where filtration systems are present (e.g. permeable pavement, biofiltration measures), infiltration rates are within 10% of the design parameters and that filtration medium are not clogged and are free from detritus.
- Orifices are secure and correctly sized and located.
- All design details are according to plan.
- Any required warning signs are installed with the correct information.

8.10 Works as Executed (WAE) Drawings & Compliance Certificates

Works as executed drawings are required for all WSUD measures. Such drawings must include storage capacities and finished and invert levels of the constructed system. Where built systems vary significantly from approved design plans, a suitably qualified engineer shall certify that the constructed system satisfies Council's requirements and shall submit all supporting calculations leading to this assertion.

All works as executed drawings must be submitted as per Wollondilly Shire Council's most recent issue of Design Specifications (DQS.05).

A Certification of WSUD Compliance shall be prepared and certified by the original design consultant in conjunction with the works as executed drawings and the final inspection prior to refund of any security deposits. The Compliance Certificate shall include:

- Certification that the built management measures will function in accordance with the approved design.
- Identification of any variation from the approved design and their impact on performance.
- Certifications that all wastewater, rainwater and stormwater re-use systems comply with relevant legislation and guidelines.

8.11 Defect liability period

The defect liability period begins after construction completion and approval by council at the final construction inspection. Agreement between council and the developer should be made for the following defects liability periods (to commence after the final construction inspections of the WSUD treatments):

- Civil assets (e.g. pipes and concrete structures) – 12 months
- Landscape vegetation/plantings and filter media – 36 months

The defect liability period should also be used to validate the operation and maintenance plans and budgets. If it is found during the defects liability period that changes to the operation and maintenance plans or budgets are required, these should be reported back to council.

8.12 Signage

Community understanding and appreciation is important for WSUD infrastructure to work successfully. WSUD is relatively new to most people who don't think about where water comes from (except when they are getting rained on) or goes to. Signage placed strategically in a prominent location will play a part in educating the community on WSUD value.

Signage design and proposed location should be developed and provided for council approval as part of the detailed design phase. Signs should be at least 600x900mm landscape format and include:

- A simple, stylised diagram of the treatment process.
- Information on the receiving waterway, local aquatic and riparian biodiversity this asset is protecting and local Aboriginal nation's significance of the local waterway.
- Relationship to other treatment measures upstream (rainwater tanks) and downstream (if any).
- If available, annual quantities of pollutants removed.
- How the community can help maintain and improve water quality.
- The WSC logo.

Signage design, location and materials must be approved by WSC prior to Subdivision Works Certificate.

8.13 Handover of WSUD Assets

This section applies to developments where WSUD measures will ultimately be handed over to Council. In this regard, Council will not consider accepting ownership of any WSUD measures unless all the following conditions are met:

- a. The WSUD assets / measures are constructed and operate in accordance with the approved design specifications / parameters and any other specific design agreements previously entered with Council.
- b. Where applicable, the build-up of sediment has resulted in no more than a 10% reduction of operational volume (e.g. of the pond, settling basin, constructed wetland).

- c. Asset inspections for defects has been completed and, if any defects are found, rectified to the satisfaction of Council.
- d. The WSUD infrastructure is to the satisfaction of Council, structurally and geotechnically sound (this will require the submission of documents demonstrating that such infrastructure has been certified by suitably qualified persons).
- e. Design drawings have been supplied in a format acceptable to Council.
- f. WAE redline mark-up PDF, ADAC xml file have been supplied for all infrastructure in a format and level of accuracy acceptable to Council.
- g. Other relevant digital files have been provided (e.g. design drawings, surveys, bathymetry, models etc).
- h. Landscape designs have been supplied, particularly those detailing the distribution of functional vegetation, i.e. vegetation that plays a role in water quality improvement (clearance certificates from the landscape architect will need to be supplied).
- i. The condition of the infrastructure and associated land is generally to the satisfaction of Council (this includes well maintained open space, board works, viewing platforms, etc).
- j. Where applicable, filter media infiltration rates are within 10% of the rates of the design parameters for the filtration system concerned (e.g. bio-retention system, permeable pavement).
- k. Comprehensive operation and maintenance manuals (including indicative costs) have been provided.
- l. Inspection and maintenance forms provided.
- m. Vegetation establishment period successfully complete as per approved landscape designs (2 years with 90% vegetation cover unless otherwise approved by Council).
- n. Copies of all required permits (both construction and operational) have been submitted.

9 Construction and maintenance

During the construction phase, WSUD systems should be protected from high sediment loads associated with construction on site (erosion and sediment control measures should be in place to manage stormwater during this phase). Refer to “Guidelines for erosion and sediment control on building sites” (NSW Department of Planning, 2024).

The commission of end of line WSUD systems should not proceed or be brought online until the civil works are completed and the catchment is stable (i.e. at least 80% of the housing construction is finished). Prior to this they may be used as a sedimentation device to manage the unstable upstream catchment. All sediment accumulated must be removed and disposed of appropriately prior to constructing the final WSUD system.

Regular maintenance is important to ensure the ongoing performance of all WSUD systems. Maintenance should be carried out as per the supplied maintenance and inspection sheets noting the following broad requirements:

- Monitoring for scour and erosion, repair as required.
- Inspect GPT's (if present) every 3 months or after large rain events and removal accumulate sediment and litter when more than 50% full.
- Monitoring inlet and sedimentation pits/basins for litter and sediment accumulation (remove litter and sediment when >50% full).
- Smaller tree pits and bioretention systems will need 3 monthly removal of litter and sediment build-up.
- Weed removal and plant re-establishment.
- Infiltration and filtering systems including bioretention swales and basin, require the monitoring of the ongoing permeability of the filter media. If water ponds for more than 1 day or runs into the overflow pit without infiltrating the filter media will need to be inspected and likely the top 100mm removed (including plants) and replaced.
- Monitoring overflow pits for structural integrity and blockage.

10 References

- Australian Government. Environment Protection and Biodiversity Conservation Act 1999 (Cth).
- NSW Government. Biodiversity Conservation Act 2016 (NSW).
- NSW Government. Environmental Planning and Assessment Act 1979 (NSW).
- NSW Government. Local Government Act 1993 (NSW).
- NSW Government. Protection of the Environment Operations Act 1997 (NSW).
- NSW Government. State Environmental Planning Policy (Biodiversity and Conservation) 2021 (NSW).
- NSW Government. Water Management Act 2000 (NSW).
- Wollondilly Shire Council. Community Strategic Plan 2040.
- Wollondilly Shire Council. Local Strategic Planning Statement
- Wollondilly Shire Council. Integrated Water Management Strategy.
- CRC for Water Sensitive Cities, 2015. Adoption guidelines for stormwater biofiltration systems.
<https://watersensitivecities.org.au/content/stormwater-biofilter-design/>
- Department of Conservation, 2006. Managing Urban Stormwater: Harvesting and reuse.
<https://www.environment.nsw.gov.au/research-and-publications/publications-search/managing-urban-stormwater-harvesting-and-reuse>
- Department of Land and Water Corporation, 1998. Constructed Wetlands Manual,
<https://www.shop.nsw.gov.au/publication/constructed-wetlands-manual-19>
- Melbourne Water 2013. WSUD Maintenance – Asset Managers Guideline
<https://www.melbournewater.com.au/planning-and-building/stormwater-management/maintenance>.
- Melbourne Water, 2005. Shallow Lake Systems Design Guidelines for Developers.
<https://www.melbournewater.com.au/media/607/download>
- Melbourne Water, 2019. Design, construction and establishment of constructed wetlands: design manual.
<https://www.melbournewater.com.au/planning-and-building/developer-guides-and-resources/standards-and-specifications/constructed-0>
- Natural Resource Management Ministerial Council, 2009. Australian guidelines for water recycling: managing health and environmental risks (phase 2), Stormwater harvesting and reuse.
<http://www.nepc.gov.au/system/files/resources/5fe5174a-bdec-a194-79ad-86586fd19601/files/wq-agwr-gl-stormwater-harvesting-and-reuse-final-200907.pdf>
- New South Wales Department of Planning, Housing and Infrastructure, 2024. Guidelines for erosion and sediment control on building sites.
- Rainwater Harvesting Organisation, 2018. <http://rainwaterharvesting.org.au/wp-content/uploads/2018/01/Rainwater-Handbook-v13-SAI-HB230-0304081.pdf>
- Rainwater Harvesting Organisation, 2018. Residential Design Specifications
<http://rainwaterharvesting.org.au/wp-content/uploads/2018/01/Rainwater-Harvesting-Guide-Approved.pdf>.
- Roads and Maritime Service, 2017. Water Sensitive Urban Design Guidelines.
- Royal Life Saving, 2019. Guidelines for Water Safety – Urban Water Developments.
<https://www.royallifesaving.com.au/aquatic-centres/managers/guidelines-for-safe-aquatic-venues/urban-water-developments>

Sydney Catchment Authority, 2011. Water Sensitive Design for Rural Subdivisions.

Sydney Catchment Authority, 2012. Using MUSIC in Sydney drinking water catchments.

https://www.watarnsw.com.au/_data/assets/pdf_file/0020/58250/Using-MUSIC-in-Sydneys-Drinking-Water-Catchments-1.pdf

Sydney Catchment Authority, 2015. Neutral or Beneficial Effect on Water Quality (NorBE) Assessment Guidelines.

Sydney Catchment Management Authority, 2011. WSUD Typical Drawings.

Sydney Water, 2011. Best practice guidelines for holistic open space turf management in Sydney.

https://www.sydneywater.com.au/web/groups/publicwebcontent/documents/document/zgrf/mdq1/~edisp/dd_045253.pdf

Sydney Water, 2013. Stormwater Harvesting Fact Sheet. [Sydney Water's stormwater harvesting and reuse fact sheet](#)

Sydney Water, 2019. Stormwater Retention and Detention for WSUD.

Water by Design, 2010. Construction and Establishment Guidelines: Swales, Bioretention Systems and Wetlands, South East Queensland Healthy Waterways Partnership. <https://hlw.org.au/download/water-by-design-construction-and-establishment-guidelines-swales-bioretention-systems-and-wetlands/>

Water by Design, 2014. Bioretention Technical Design Guidelines Version 1.1.

<https://hlw.org.au/download/bioretention-technical-design-guidelines/>

Water by Design, 2017. Wetland Technical Guidelines. <https://hlw.org.au/download/wetland-technical-design-guidelines/>

Water by Design, 2019. Water Sensitive Designs ideas.

11 Attachments

11.1 Attachment 1 - Development Application Checklist (lodged with DA)

 Water Sensitive Urban Design Development Application Checklist			
Site/ Project Name			
Lot and DP Number:		DA Number:	
Information Required with DA Submission:		Y	N
1	Has a Water Sensitive Urban Design Strategy been submitted as part of the development application?		
2	Is a BASIX Certificate required? If so, Yes - Attach certificate with DA		
3	Has the digital version of MUSIC and report on the MUSIC model using data prescribed outlined in Council's Technical Guideline been attached? Have stormwater quality retention criteria (TSS 85%, TP 60%, and TN 45%) and water quantity / drainage requirements been met and documented in the WSUD Strategy? If relevant, have the Water Conservation, Quantity and Quality targets been achieved?		
4	Does WSUD Strategy contain the following information? - Review of the WSUD principles and ensure that these are considered throughout development of the WSUD strategy. - Confirmation of the WSUD objectives that are relevant to the development application. - Confirmation of the WSUD targets for potable water conservation, stormwater quantity management and stormwater quality management that are relevant to the development application. - Complete a site analysis to evaluate the site characteristics that potentially will impact on the feasibility of WSUD for the site. WSUD measures that would be appropriate for the development considering the development scale, site characteristics, stormwater quantity management function and stormwater quality management function. - A preliminary WSUD strategy that positions the selected WSUD measures in appropriate locations and arranges the measures in an appropriate series. Numerical modelling utilising MUSIC software to evaluate appropriate sizes of the WSUD measures. Concept designs of the WSUD measures. WSUD strategy report that summarises the methodology and WSUD outcomes and provide this with the development application for the site.		
5	Have the conceptual plans of the proposed stormwater treatment measures been included on the plans? (Detailed engineering plans will be required for the construction certificate)		

 Water Sensitive Urban Design Development Application Checklist			
6	Has a Draft Operation and Maintenance Plan which includes details on the following been provided? • Site description (area, imperviousness, land use, annual rainfall, topography etc.) • Site access description • Likely pollutant types, sources and estimated loads • Locations, types and descriptions of measures proposed • Operation and maintenance responsibility (council, developer or owner) • Inspection methods • Maintenance methods (frequency, equipment and personnel requirements including Work Health and Safety requirements) • Landscape and weed control requirements • Operation and maintenance costs • Waste management and disposal options, and • Reporting.		

11.2 Attachment 2 - Construction Certificate Application Checklist (lodged with CC)

		Water Sensitive Urban Design Construction Certificate Checklist	
Site/ Project Name			
Lot and DP Number:		DA Number:	
Information Required with Subdivision Works Certificate Application:		Y	N
1	Have detailed construction plans (including all calculations, drawings and designs) been submitted?		
2	Are detailed design drawings generally in accordance with the development applications conditions of consent, approved concept plans, MUSIC modelling?		
3	Has an Erosion and Sedimentation Control Plan been submitted for approval?		
4	Has a final Operation and Maintenance Plan which includes details on the following been provided? • Site description (area, imperviousness, land use, annual rainfall, topography etc.) • Site access description • Likely pollutant types, sources and estimated loads • Locations, types and descriptions of measures proposed • Operation and maintenance responsibility (council, developer or owner) • Inspection methods • Maintenance methods (frequency, equipment and personnel requirements including Work Health and Safety requirements) • Landscape and weed control requirements • Operation and maintenance costs • Waste management and disposal options, and • Reporting.		

11.3 Attachment 3 – MUSIC parameters

The stormwater treatment performance of each WSUD system should be modelled using MUSIC. The treatment system can include individual WSUD assets or a treatment train including multiple assets. There are several input parameters for MUSIC, and these should be based on *Water NSW Using MUSIC in Sydney's Drinking Water Catchment*.

Council has a MUSIC template available for download. All climate data, pollutant concentrations and asset design parameters are already set up and ready to use.

WSC recommends using climatic data from BoM's Rockwood weather station. Analysis of past climatic conditions and how they best match current conditions has been undertaken. This has identified the period 1/1/1975 to 31/12/1984 data set best represents the region and best match long-term meteorological records in terms of mean annual rainfall and the 90th percentile of rainfall. Rainfall data sets for stormwater treatment systems should include this 10-year period as a minimum with a 6 minute time step.

For other input parameters refer to the Appendix 3 and Water NSW 'Using MUSIC in Sydney's Drinking Water Catchment'.

The MUSIC model is the most widely used model in Australia. As with all such models, however, the accuracy of the model predictions is based on the validity of the inputs to the model. Therefore, MUSIC modelling must be undertaken in accordance with the current best practice modelling guidelines, unless alternative modelling parameters are justified based on local studies.

Council highly recommends that applicants employ the services of appropriately qualified and experienced practitioner(s) for the development of appropriate WSUD Strategy and associated modelling.

11.4 Attachment 4 – Plant species and densities

The following section provide guidance on types pf plant to use in WSUD system.

All plants should be sourced as locally as possible, be of good quality and stock, be healthy and have good soil moisture and root development when they arrive on site.

Council reserves to right to inspect stock before it is installed.

Plantings must be maintained for 24 months ensuring minimal weed competition and maintaining good soil and plant health.

11.4.1 Swales

Table drains and swales should have a cover over the soil to eliminate erosion and transportation of sediments.

For general roadside drains that are not planted out with a specific plant mix, a general grass mix would be suitable with a preference to warm season grass types. Planting densities should be as follows:

- Where Jute matting is used 6 plants per square meter of tube stock plant. 140mm pots are not recommended for jute mat planting but if they are used 4 pots per square metre may be used.
- Rock, bark and organic mulches are not recommended for swales.
- If no jute matting is use, 8- plants per square metre is recommended if using tube stock and 6 plants per square metre of using 140mm pots.

11.4.2 Raingardens and bioretention basin

Similar to swales, the following planting specification apply.

Raingardens and bioretention basin should only be planted after the catchment has been developed and sediment loading has reduced, unless a suitable sediment protect pit has been installed and maintained upstream.

Planting densities should be as follows:

- Rock, bark and organic mulches and jute matting may be used on the batter. These are not recommended for the base of the system.
- Within mulch or Jute matting 6 plants per square meter of tube stock plant. 140mm pots are not recommended for jute mat planting, if used in mulches 4 pots per square metre may be used.
- For the base of the systems 8- plants per square metre is recommended if using tube stock and 6 plants per square metre of using 140mm pots.

11.4.3 Constructed wetlands, sediment basins and ponds

Wetlands remove pollutant through slowing down the flow and particles dropping out of the flow, and by nutrients being utilised by plants and biofilms growing on the steams of plants. Therefore, maximising the number of plants stems that the flow must pass through will maximise the treatment potential.

Hence planting benches established across the flow are important. Shallow water (0-300mm) are the ideal environment for marsh plants to grow. Allowing these areas to seasonally dry out is also useful, but hard to achieve when the contributing catchment are largely impermeable.

The planting mix should include a range of deep marsh, shallow marsh and ephemeral plantings (as outlined below) as well as surrounding terrestrial and deeper aquatic plants for open water.

Water levels will need to be controlled during establishment phase to ensure young plants are not inundated for more than 24 hours or exposed to high turbidity. Aquatic plants establish best when installed in spring, at the start of their growing season, when water temperatures begin to increase. Aquatic planting should not be undertaken after mid-summer as they will not have sufficient time to establish.

Planting density are more challenging to achieve or enforce in wetlands and many are spreading plants. The aim would be to install 6-8 “plants” per square metre. But a better measure would be to achieve more than 80% coverage after 2 years of establishment.

Protection of certain plant species that are highly palatable to water birds will also need to be considered. This will minimise predation and the pulling out of plants before they have set roots.

WETLAND PLANTING ZONES.

ID	PLANTING ZONE	DEPTH RANGE
TE	Terrestrial	> +0.2 m
EB	Ephemeral batter	NWL to +0.2 m
SM	Shallow marsh	NWL to -0.2 m
DM	Deep marsh	-0.2 m to -0.4 m
SU	Submerged marsh	-0.4 m to -0.7 m

PROPOSED LIFEFORMS:

F - Floating macrophyte
S - Submerged macrophyte
E - Emergent macrophyte
G - Groundcover
SH - Shrub
T - Tree

11.4.4 Core functional plant species

SPECIES NAME	COMMON NAME	PLANTING ZONE	LIFEFORM	PLANTING DENSITY (PLANTS/M ²)
<i>Alisma plantago-aquatica</i>	Water Plantain	SM	E	5
<i>Baloskion tetraphyllum</i>	Tassel cord rush	EB	E	5
<i>Baumea articulata</i>	Jointed Twig-rush	DM	E	5
<i>Baumea articulata</i> (Wet edge only)	Jointed Twig-rush	EB, SM	E	5
<i>Baumea juncea</i> (Wet edge only)	Bare Twig-rush	EB, SM	E	5
<i>Baumea rubiginosa</i> (Wet edge only)	Soft Twig-rush	EB	E	5
<i>Bolboschoenus caldwellii</i>	Sea Club-rush	SM	E	5
<i>Bolboschoenus fluviatilis</i>	Marsh Club-rush	DM	E	5
<i>Carex appressa</i>	Tall Sedge	EB	E	5
<i>Carex fascicularis</i> (Wet edge only)	Tassel Sedge	SM	E	5
<i>Carex gaudichadiana</i> (Wet edge only)	Tufted sedge	SM	E	5
<i>Cladium procerum</i>	Leafy twig-rush	SM, DM	E	5
<i>Cyperus exaltatus</i> (Wet edge only)	Giant Sedge	SM	E	5
<i>Eleocharis acuta</i>	Common Spike-rush	SM	E	5
<i>Eleocharis sphacelata</i>	Tall Spike-rush	DM	E	5
<i>Ficinia nodosa</i>	Knobby Club-rush	EB	E	5
<i>Juncus conyinuus</i>	Rush	EB	E	5
<i>Juncus usitatus</i> (Wet edge only)	Common Rush	EB	E	5
<i>Lepironia articulata</i>	Grey Rush	SM, DM	E	5
<i>Ludwigia peploides</i> (Wet edge only)	Water Primrose	EB	E	5
<i>Philydrum lanuginosum</i>	Woolly Waterlily	SM	E	4

SPECIES NAME	COMMON NAME	PLANTING ZONE	LIFEFORM	PLANTING DENSITY (PLANTS/M ²)
<i>Phragmites australis</i>	Common reed	SM, DM	E	2
<i>Schoenoplectus mucronatus</i>	Club-rush	SM, DM	E	5
<i>Schoenoplectus validus</i>	River Club-rush	SM	E	5
<i>Marsilea mutica</i>	Nardoo	SM	F	5
<i>Triglochin procerum</i>	Water-ribbon	SM, DM	F	5
<i>Austrodanthonia tenuior</i>	Wallaby grass	EB, SM, TE	G	5
<i>Commelina cyanea</i>	Scurvy weed	EB, SM, TE	G	5
<i>Convolvulus erubescens</i>	Blushing bindweed	EB, SM, TE	G	5
<i>Cymbopogon refractus</i>	Barbed wire grass	TE	G	5
<i>Cyperus difformis</i>	Variable flatsedge	EB, TE	G	5
<i>Dianella caerulea</i>	Blue Flax-lily	EB, SM, TE	G	5
<i>Dianella revoluta</i>	Blueberry Lily	EB, SM, TE	G	5
<i>Dichelachne crinita</i>	Longhair plume grass	TE	G	5
<i>Dichondra repens</i>	Kidney Weed	EB, SM, TE	G	5
<i>Echinopogon caespitosus</i>	Hedgehog grass	TE	G	5
<i>Gahnia aspera</i>	Rough Saw-sedge	EB, SM, TE	G	2
<i>Gahnia sieberiana</i>	Red-fruited Sword Sedge	EB, SM, TE	G	1
<i>Glycine clandestina</i>	Twining glycine	EB, SM, TE	G	5
<i>Goodenia hederacea</i>	Forest goodenia	EB, SM, TE	G	5
<i>goodenia ovata</i>	Hop goodenia	EB, SM, TE	G	5
<i>isolepis nodosa</i>	Knobby club-rush	EB, SM	G	5
<i>Lomandra fluvialis</i>	River Mat-rush	EB, TE	G	5
<i>Lomandra longifolia</i>	Spiny-headed Mat Rush	EB, TE	G	4
<i>Lomandra multiflora</i>	Many Flowered Mat Rush	EB, TE	G	5
<i>Microlaena stipoides</i>	Weeping grass	EB, SM, TE	G	5
<i>Pericaria decipiens (Wet edge only)</i>	Slender Knotweed	EB	G	5
<i>Pericaria strigosa (Wet edge only)</i>	Spotted Knotweed	EB	G	5
<i>Plectranthus parviflorus</i>	Cockspur flower	EB, SM, TE	G	5
<i>Poa labillardieri</i>	Tussock Grass	EB, TE	G	5
<i>Pseudoraphis spinescens (Wet edge only)</i>	Spiny Mud Grass	EB	G	5
<i>Scaevola aemula</i>	Common fan-flower	EB, SM, TE	G	5
<i>Scaevola albida</i>	Pale fan-flower	EB, SM, TE	G	5
<i>Schoenus melanostachys</i>	Black Bog-rush	EB, SM, TE	G	5
<i>Stypandra glauca</i>	Nodding blue lily	EB, SM, TE	G	5
<i>Tetrasgonia tetragonoides</i>	Warrigal Greens	EB, SM, TE	G	5

SPECIES NAME	COMMON NAME	PLANTING ZONE	LIFEFORM	PLANTING DENSITY (PLANTS/M ²)
<i>Themeda triandra</i>	Kangaroo Grass	EB, SM, TE	G	5
<i>Viola hederacea</i>	Ivy-leaved Violet	EB, SM, TE	G	5
<i>Hydrilla verticillata</i>	Water thyme	SU	S	5
<i>Myriophyllum varifolium</i>	Common Water-milfoil	SU	S	5
<i>Myriophyllum variifolium</i>	Water Milfoil	DM, SU	S	5
<i>Ottelia ovalifolia</i>	Swamp Lily	SU	S	5
<i>Vallisneria gigantea</i>	Ribbonweed	SU	S	5
<i>Baeckea linifolia</i>	Weeping baeckea	EB, SM, TE	SH	1
<i>Banksia robour</i>	Swamp banksia	EB, SM, TE	SH	0.5
<i>Bauera rubioides</i>	River Rose	EB, SM, TE	SH	2
<i>Breynia oblongifolia</i>	Coffee bush	TE	SH	2
<i>Callistemon citrinus</i>	Red Bottlebrush	EB, SM, TE	SH	1
<i>Callistemon linearis</i>	Narrow-leaved bottlebrush	EB, SM, TE	SH	1
<i>Callistemon rigidus</i>	Stiff bottlebrush	EB, SM, TE	SH	1
<i>Hakea salicifolia</i>	Willow-leaved hakea	EB, SM, TE	SH	0.5
<i>Hymenanthera dentata</i>	Tree violet	EB, SM, TE	SH	1
<i>Leptospermum polygalifolium</i>	Tantoon	EB, SM, TE	SH	0.5
<i>Lomatia myricoides</i>	River Lomatia	EB, SM, TE	SH	1
<i>Melaleuca squamea</i>	Swamp honey-myrtle	EB, SM, TE	SH	0.5
<i>Melaleuca erubescens</i>	Rosy Honey-myrtle	EB, SM, TE	SH	1
<i>Melaleuca hypericifolia</i>	Hillock bush	EB, SM, TE	SH	0.5
<i>Melaleuca thymifolia</i>	Thyme honey-myrtle	EB, SM, TE	SH	2
<i>Myoporum acuminatum</i>	Boobialla	TE	SH	1
<i>Notelaea longifolia</i>	Large Mock-olive	TE	SH	1
<i>Ozothamnus diosmifolius</i>	Rice flower	TE	SH	1
<i>Philothea myoporoides</i>	Long-leaf Wax Flower	EB, SM, TE	SH	1
<i>Pittosporum revolutum</i>	Wild Yellow Jasmine	TE	SH	1
<i>Solanum prinophyllum</i>	Forest nightshade	TE	SH	4
<i>Trema tomentosa</i>	Native Peach	TE	SH	0.5
<i>Viminaria juncea</i>	Native broom	EB, SM, TE	SH	0.5
<i>Westringia longifolia</i>	Long-leaved Westringia	EB, SM, TE	SH	1
<i>Acacia floribunda</i>	White sally wattle	TE	T	0.1
<i>Acmena smithii</i>	Lilly pilly	TE	T	0.1
<i>Allocasuarina littoralis</i>	Black she-oak	TE	T	0.25
<i>Allocasuarina torulosa</i>	Forest Oak	TE	T	0.1

SPECIES NAME	COMMON NAME	PLANTING ZONE	LIFEFORM	PLANTING DENSITY (PLANTS/M ²)
<i>Alphitonia excelsa</i>	Red ash	TE	T	0.1
<i>Angophora subvelutina</i>	Broad-leaved apple	TE	T	0.1
<i>Backhousia myrtifolia</i>	Grey myrtle	TE	T	0.1
<i>Brachychiton populneus</i>	Kurragong	TE	T	0.1
<i>Callistemon salignus</i>	Willow bottlebrush	EB, SM, TE	T	0.1
<i>Elaeocarpus reticulatus</i>	Blueberry ash	TE	T	0.1
<i>Glochidion ferdinandi</i>	Cheese tree	TE	T	0.1
<i>Hymenosporum flavum</i>	Native frangipani	TE	T	0.1
<i>Melaleuca decora</i>	White feather honeymyrtle	EB, SM, TE	T	0.1
<i>Melaleuca linariifolia</i>	Snow-in-summer	EB, SM, TE	T	0.1
<i>Melaleuca nodosa</i>	Prickly-leaved paperbark	EB, SM, TE	T	0.1
<i>Melaleuca styphelioides</i>	Prickly-leaved Tea Tree	EB, SM, TE	T	0.1
<i>Melia azedarach</i>	White cedar	TE	T	0.1
<i>tristaniaopsis laurina</i>	Water gum	EB, SM, TE	T	0.1

11.4.5 Tree species

BOTANICAL NAME	COMMON NAME	DESCRIPTION	INFRASTRUCTURE TYPE:	SUITABLE LOCATION:
Native Species				
<i>Acacia elata</i>	Cedar Wattle	A tall, long-lived wattle with a dense conical to domed canopy, typically growing up to 30 m. Offers excellent shade and habitat for wildlife.	Passively watered street tree (Infiltration trench) for a park. Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Park
<i>Acacia melanoxylon</i>	Blackwood wattle	A medium to large tree reaching 7–20 m high and 4–10 m wide. Ideal for parks and broader streetscapes due to its strong form and longevity. Attracts birds, butterflies, and insects.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Raingarden blister within streetscape Tree pit Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Street tree - Smaller verge (1.6m) Roundabout/Median Carpark Park
<i>Acronychia oblongifolia</i>	White Aspen	Medium sized tree up to 25m tall. Good dense canopy. Small white flowers followed by white fruit which are edible.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Street tree - Larger verge (2.1m) Roundabout /Median Carpark Park
<i>Acmena smithii</i>	Lilly Pilly,	A hardy, long-lived tree with an attractive canopy and dense form. Reaches 8–10 m high and spreads 3–4 m. Tolerant of a range of conditions but may take time to establish. Avoid near walkways, as fruit drop can create litter.	Passively watered street tree (Infiltration trench) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Naturalised planting Street tree - Smaller verge (1.6m) *not over footpath Park
<i>Agathis robusta</i>	Kauri Pine	Slow-growing evergreen conifer with a straight cylindrical trunk and symmetrical crown. Features glossy wide leaves and smooth bark that sheds in flakes. Typically grows to 30–40 m high and 15–30 m wide	Passively watered street tree (Infiltration trench) Actively watered with stormwater harvesting or recycled water (purple pipe)	Town Centre/Plaza Roundabout/Median Carpark Park
<i>Alectryon subcinereus</i>	Native Quince	Small tree which grows around 5m. Good dense canopy. Produces small fruits in winter.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Naturalised planting Street tree - Smaller verge (1.6m) Park
<i>Allocasuarina torulosa</i>	Rose she-oak	Slender, evergreen tree with drooping needle-like foliage and corky bark. Produces small cones	Passively watered street tree (Infiltration trench)	Naturalised planting

BOTANICAL NAME	COMMON NAME	DESCRIPTION	INFRASTRUCTURE TYPE:	SUITABLE LOCATION:
		and reddish flowers in winter. Typically reaches 10–20 m in height and 6–8 m in width.	Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Street tree - Smaller verge (1.6m) Street tree - Larger verge (2.1m) Park
<i>Alloxylon flammeum</i>	Tree Waratah	Medium to large evergreen tree with upright form and dense foliage. Notable for its brilliant red flowers in spring. Typically grows to 12–25 m high and 4–10 m wide.	Passively watered street tree (Infiltration trench) Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Street tree - Smaller verge (1.6m) Town Centre/Plaza Roundabout Carpark Park
<i>Alphitonia excelsa</i>	Red Ash	Can grow to 20m high and 10m wide. Has a wide canopy. Small cream blossoms in late autumn and early winter followed by small dark fruit. Semi deciduous.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Street tree - Larger verge (2.1m) Roundabout Park
<i>Angophora floribunda</i>	Rough-Barked Apple	Large, spreading evergreen tree with fibrous grey bark and gnarled trunk. Features broad lanceolate leaves and white flowers in summer. Typically grows to 15–30 m high and 10–15 m wide.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Bioretention/rain garden basin Raingarden blister within streetscape Tree pit Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Roundabout/Median Carpark Park
<i>Angophora subvelutina</i>	Broad-leaved apple	Medium-sized evergreen tree with rough bark and broad leaves. Similar in appearance to <i>A. floribunda</i> but with distinctive canopy. Typically reaches 8–15 m in height and 8–15 m in width.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Bioretention/rain garden basin Raingarden blister within streetscape Tree pit Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Roundabout/Median Carpark Park
<i>Backhousia citriodora</i>	Lemon myrtle	Small tree up to 6m tall. Cream coloured flowers produced from summer-autumn. Fragrant foliage that can be used in cooking or teas.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Street tree - Smaller verge (1.6m)

BOTANICAL NAME	COMMON NAME	DESCRIPTION	INFRASTRUCTURE TYPE:	SUITABLE LOCATION:
				Town Centre/Plaza Carpark Park
<i>Backhousia myrtifolia</i>	Grey myrtle	Attractive tree with finely flaky brown bark and dense foliage. Produces white flowers and has a general lilly-pilly appearance. Typically grows to 10–30 m high and 5–10 m wide.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Raingarden blister within streetscape Tree pit Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Naturalised planting Street tree - Smaller verge (1.6m) Town Centre/Plaza Carpark Park
<i>Brachychiton acerifolius</i> and <i>cultivars/hybrids</i>	Illawarra Flame tree	Deciduous tree with a pyramidal form, known for its brilliant scarlet bell-shaped flowers in late spring. Grows to 10–35 m high and 5–15 m wide.	Passively watered street tree (Infiltration trench) Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Street tree - Smaller verge (1.6m) Town Centre/Plaza Roundabout Carpark Park
<i>Brachychiton discolor</i> and <i>cultivars/hybrids</i>	Lacebark Tree	Semi-deciduous tree with a stout trunk and large, lobed leaves. Produces pink bell-shaped flowers in summer. Typically grows to 10–30 m high and 8–12 m wide.	Passively watered street tree (Infiltration trench) Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Street tree - Smaller verge (1.6m) Town Centre/Plaza Roundabout Carpark Park
<i>Brachychiton populneus</i> and <i>cultivars/hybrids</i>	Kurrajong	Evergreen tree with a dense, rounded canopy and bottle-shaped trunk. Displays creamy-white bell-shaped flowers with red centres in summer. Grows to 10–15 m high and 8–10 m wide.	Passively watered street tree (Infiltration trench) Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Naturalised planting Street tree - Smaller verge (1.6m) Town Centre/Plaza Roundabout Carpark Park

BOTANICAL NAME	COMMON NAME	DESCRIPTION	INFRASTRUCTURE TYPE:	SUITABLE LOCATION:
<i>Buckinghamia celsissima</i>	Ivory Curl Tree	Evergreen tree with a rounded canopy and glossy leaves. Notable for its long, ivory-coloured flower spikes in summer. In cultivation, grows to 5–10 m high and 3–6 m wide.	Passively watered street tree (Infiltration trench) Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Street tree - Smaller verge (1.6m) Town Centre/Plaza Roundabout Carpark Park
<i>Callistemon salignus</i>	Willow bottlebrush	Tall shrub or small tree, potentially reaching 10 m tall with paper-bark (in the Melaleuca-fashion). Does not perform as consistently well as other street trees listed therefore is only recommended for natural plantings. Tends to get sooty mould, branch failure and poor form that needs more maintenance as a street tree.	Swale (offset from centre) Bioretention embankment Bioretention/rain garden basin Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Park
<i>Ceratopetalum apetalum</i>	Coachwood	Medium to tall hardwood tree with smooth, fragrant grey bark and glossy leaves. Produces small white flowers in early summer. Typically grows to 25–40 m high and 6–10 m wide.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Street tree - Smaller verge (1.6m) Street tree - Larger verge (2.1m) Town Centre/Plaza Roundabout Carpark Park
<i>Clerodendrum tomentosum</i>	Hairy Clerodendrum	Small tree to 10m. White flowers followed by purple fruit with red calyx.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Naturalised planting Park
<i>Corymbia eximia</i>	Yellow Bloodwood	Medium to tall hardwood tree with smooth, fragrant grey bark and glossy leaves. Produces small white flowers in early summer. Typically grows to 25–40 m high and 6–10 m wide.	Passively watered street tree (Infiltration trench) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Street tree - Smaller verge (1.6m) – only when using dwarf 'nana' variety Street tree - Larger verge (2.1m) Town Centre/Plaza

BOTANICAL NAME	COMMON NAME	DESCRIPTION	INFRASTRUCTURE TYPE:	SUITABLE LOCATION:
				Roundabout /Median Carpark Park
<i>Corymbia maculata</i>	Spotted Gum	Tall, straight tree with smooth, mottled bark in shades of white, grey, and pink. Grows to 20–30 m high and 10–15 m wide.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Raingarden blister within streetscape Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Roundabout /Median Carpark Park
<i>Cryptocarya microneura</i>	Murrogun	Medium tree that grows around 10-20m tall. Good dense crown. Produces small dark fruit that are bird attracting.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Street tree - Smaller verge (1.6m) Roundabout /Median Park
<i>Diospyros pentamera</i>	Myrtle Ebony	Evergreen rainforest tree that grows up to 15m. White bell shaped flowers in spring followed by red fruit. Bird and pollinator attracting.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Naturalised planting Street tree - Smaller verge (1.6m) Town Centre/Plaza Roundabout /Median Carpark Park
<i>Eucalyptus amplifolia</i>	Cabbage Gum	Medium to tall tree with smooth, white to grey bark shedding in large plates. Typically reaches 20–30 m in height and 15–20 m in width.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Bioretention/rain garden basin Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Roundabout /Median Carpark Park
<i>Eucalyptus baueriana</i>	Blue Box	Medium-sized tree with fibrous, flaky bark on trunk and larger branches, smooth above. Grows to 15–20 m high and up to 15 m wide.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Bioretention/rain garden basin Raingarden blister within streetscape	Naturalised planting Roundabout /Median Carpark Park

BOTANICAL NAME	COMMON NAME	DESCRIPTION	INFRASTRUCTURE TYPE:	SUITABLE LOCATION:
<i>Eucalyptus camaldulensis</i>	River Red Gum	Large tree with smooth, white to grey bark, often rough at the base. Typically grows to 15–25 m high and 12–25 m wide.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Roundabout /Median Carpark Park
<i>Eucalyptus crebra</i>	Narrow Leaved Ironbark	Tall tree with dark grey to black deeply furrowed ironbark and narrow lance-shaped leaves. Grows to 20–35 m high and 10–15 m wide.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Roundabout /Median Carpark Park
<i>Eucalyptus elata</i>	River Peppermint	Tall tree with rough bark on lower trunk and smooth white bark above, shedding in long ribbons. Grows up to 40 m high and 15 m wide. Not for bushfire prone areas due to bark shed.	Bioretention embankment Swale (offset from centre) Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Park
<i>Eucalyptus fibrosa</i>	Broad Leaved Ironbark	Medium to tall tree with rough, grey to black ironbark and broad lance-shaped leaves. Typically reaches 10–20 m in height and 5–8 m in width.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Roundabout /Median Park
<i>Eucalyptus longifolia</i>	Woodybutt	Tall tree with rough, fibrous bark on trunk and larger branches, smooth above. Grows to 20–35 m high and 10–15 m wide.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Park
<i>Eucalyptus microcorys</i>	Tallowood	Large tree with fibrous, orange-brown bark and glossy green leaves. Typically grows to 40–60 m high and 10–15 m wide.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Actively watered with stormwater harvesting or recycled water (purple pipe)	Roundabout /Median Park
<i>Eucalyptus moluccana</i>	Grey Box	Medium to tall tree with rough, fibrous bark on lower trunk and smooth grey bark above. Grows to 20–30 m high and 10–15 m wide.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Roundabout /Median Carpark Park
<i>Eucalyptus notabilis</i>	Blue Mountains Mahogany	Medium-sized tree with rough, fibrous bark and dark green leaves.	Passively watered street tree (Infiltration trench)	Naturalised planting

BOTANICAL NAME	COMMON NAME	DESCRIPTION	INFRASTRUCTURE TYPE:	SUITABLE LOCATION:
		Typically reaches 15–25 m in height and 10–15 m in width.	Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Roundabout /Median Park
<i>Eucalyptus paniculata</i>	Grey Ironbark	Tall tree with dark grey to black deeply furrowed ironbark and lance-shaped leaves. Grows to 30–50 m high and 10–15 m wide.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Roundabout /Median Park
<i>Eucalyptus resinifera</i>	Red Mahogany	Large tree with rough, fibrous bark and dark green leaves. Typically grows to 30–45 m high and 10–15 m wide.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Roundabout /Median Park
<i>Eucalyptus robusta</i>	Swamp Mahogany	Medium to tall tree with rough, fibrous bark and broad lance-shaped leaves. Grows to 20–30 m high and 10–15 m wide.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Roundabout /Median Park
<i>Eucalyptus sideroxylon</i>	Mugga Ironbak	Tall tree with dark, deeply furrowed ironbark and narrow lance-shaped leaves. Typically reaches 20–35 m in height and 10–15 m in width.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Roundabout /Median Park
<i>Eucalyptus tereticornis</i>	Forest Redgum	Tall tree with smooth, mottled bark shedding in irregular patches and lance-shaped leaves. Grows to 20–50 m high and 10–15 m wide.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Roundabout /Median Park
<i>Eucalyptus viminalis</i>	Manna Gum	Medium tree to 30m tall. Flowers late summer to autumn. Bird and pollinator attracting.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment	Naturalised planting Park
<i>Ehretia acuminata</i>	Koda	Semi deciduous rainforest tree to 30m. Sweet edible orange berries. Bird attracting.	Passively watered street tree (Infiltration trench) Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Street tree - Larger verge (2.1m) Roundabout /Median

BOTANICAL NAME	COMMON NAME	DESCRIPTION	INFRASTRUCTURE TYPE:	SUITABLE LOCATION:
				Park
<i>elaecarpus eumundi</i>	Eumundi Quandong	Evergreen tree with glossy dark green leaves and bronze new growth. Produces scented cream flowers in early summer, followed by small blue fruit. Grows to 12–25 m high and 3–5 m wide.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Actively watered with stormwater harvesting or recycled water (purple pipe)	Street tree - Larger verge (2.1m) Town Centre/Plaza Roundabout /Median Carpark Park
<i>Elaeocarpus reticulatus</i>	Blueberry ash	A large shrub to small tree, usually narrow in habit. Fast growing hardy plant, flower freely in full sun. Typically grows to 3–8 m high and 2–4 m wide.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Naturalised planting Street tree - Smaller verge (1.6m) Town Centre/Plaza Roundabout /Median Carpark Park
<i>Ficus coronata</i>	Sandpaper Fig	Fast-growing tree with rough-textured leaves and edible purple figs. Commonly found along creeks and rainforests. Grows to 6–15 m high and 4–6 m wide.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Street tree - Larger verge (2.1m) Roundabout /Median Park
<i>Ficus macrophylla</i>	Moreton bay fig	Large evergreen tree with a massive spreading canopy and buttressed roots. Produces small figs and provides excellent shade. Grows to 30–60 m high and 20–30 m wide.	Passively watered street tree (Infiltration trench) Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Park Roundabout /Median
<i>Ficus rubiginosa</i>	Port Jackson Fig	Evergreen tree with a dense, wide-spreading crown and buttressed trunk. Leaves are glossy green above and rusty beneath. Grows to 10–30 m high and 10–20 m wide.	Passively watered street tree (Infiltration trench) Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Park Roundabout /Median
<i>Ficus superba var. henniana</i>	Superb Fig	Tall, buttressed tree or "strangler" with deep green, glossy foliage. Produces large, edible purple figs. Grows to 15–35 m high and 10–15 m wide.	Passively watered street tree (Infiltration trench) Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Park Roundabout /Median
<i>Flindersia australis</i>	Australian Teak	Semi-deciduous tree with a dense, oval crown and compound leaves. Produces white to cream flowers	Passively watered street tree (Infiltration trench)	Naturalised planting

BOTANICAL NAME	COMMON NAME	DESCRIPTION	INFRASTRUCTURE TYPE:	SUITABLE LOCATION:
		and woody capsules. Grows to 20–40 m high and 10–15 m wide.	Actively watered with stormwater harvesting or recycled water (purple pipe)	Street tree - Smaller verge (1.6m) Street tree - Larger verge (2.1m) Roundabout /Median Park
<i>Glochidion ferdinandi</i>	Cheese tree	Fast-growing tree with glossy green leaves and distinctive cheese-shaped fruit that attract birds. Grows to 8–15 m high and 6–8 m wide.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Street tree - Smaller verge (1.6m) Roundabout /Median Carpark Park
<i>Guioa semiglauc</i>	Guioa	Small tree to 6m. Produces green/yellow flowers followed by white small fruit.	Passively watered street tree (Infiltration trench) Swale Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Street tree - Smaller verge (1.6m) Park
<i>Hymenosporum flavum</i>	Native frangipani	Evergreen tree with glossy green leaves and fragrant, frangipani-like yellow flowers. Grows to 6–25 m high and 5–10 m wide.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Naturalised planting Street tree - Smaller verge (1.6m) Town Centre/Plaza Roundabout /Median Carpark Park
<i>Lagunaria patersonia</i>	Norfolk Island Hibiscus	Evergreen hardy tree that grows to 20m high x 7m wide. Showy pink flowers in spring/summer. Seed pods can be irritating however is a spectacular tree. Utilise more in areas with less public interface like roundabouts, car parks, or median swales. Flowers attract many pollinators.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Actively watered with stormwater harvesting or recycled water (purple pipe)	Roundabout/Median
<i>Leptospermum petersonii</i>	Lemon scented tea-tree	Evergreen tree with dense foliage and attractive bark. Produces clusters of white flowers. Grows to 10–30 m high and 5–15 m wide.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Raingarden blister within streetscape Tree pit	Garden Street tree - Smaller verge (1.6m) Town Centre/Plaza

BOTANICAL NAME	COMMON NAME	DESCRIPTION	INFRASTRUCTURE TYPE:	SUITABLE LOCATION:
			Actively watered with stormwater harvesting or recycled water (purple pipe)	Carpark Park
<i>Lophostemon confertus</i>	Brush box	Small to medium tree with white papery bark and profuse cream flowers in spring and early summer. Grows to 5–10 m high and 3–6 m wide.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Raingarden blister within streetscape Tree pit Actively watered with stormwater harvesting or recycled water (purple pipe)	Street tree - Larger verge (2.1m) Roundabout /Median Carpark Park
<i>Melaleuca bracteata</i>	Black tea-tree	Small tree 5-10m. Fast growing. Fragrant white flowers in summer.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Raingarden blister within streetscape Tree pit Actively watered with stormwater harvesting or recycled water (purple pipe)	Street tree - Smaller verge (1.6m) Carpark Park
<i>Melaleuca decora</i>	White feather honeymyrtle	Small native tree with white paperbark cream in colour. Profuse flowering in spring and early summer	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Bioretention/rain garden basin Raingarden blister within streetscape Tree pit Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Street tree - Smaller verge (1.6m) Roundabout /Median Carpark Park
<i>Melaleuca linariifolia</i>	Snow-in-summer	Attractive paperbark trunk which is cream in colour. Fine soft foliage. Masses of creamy white flowers in spring	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Bioretention/rain garden basin Raingarden blister within streetscape Tree pit Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Street tree - Smaller verge (1.6m) Town Centre/Plaza Roundabout /Median Carpark Park
<i>Melaleuca lucadendra</i>	Weeping paperbark	10-30m tall. Can flower anytime of the year producing white flowers.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Raingarden blister within streetscape Tree pit Actively watered with stormwater harvesting or recycled water (purple pipe)	Street tree - Smaller verge (1.6m) Carpark Park

BOTANICAL NAME	COMMON NAME	DESCRIPTION	INFRASTRUCTURE TYPE:	SUITABLE LOCATION:
<i>Melaleuca quinquenervia</i>	Broad-leaved Paperbark	Medium to tall tree with spongy, white papery bark and creamy bottlebrush flowers. Grows to 8–25 m high and 5–10 m wide.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Raingarden blister within streetscape Tree pit Actively watered with stormwater harvesting or recycled water (purple pipe)	Street tree - Larger verge (2.1m) Roundabout /Median Carpark Park
<i>Melaleuca styphelioides</i>	Prickly-leaved Tea Tree	Medium-sized tree up to 20 m tall with distinctive whitish-brown papery bark and small, bright green, pointed leaves. Produces creamy-white flowers in spring and summer.	Swale (offset from centre) Bioretention embankment Bioretention/rain garden basin Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Park
<i>Melaleuca viridifolia</i>	Broad-leaved paperbark	Grows to 10m tall. Flowers can either be red or yellow/green.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Raingarden blister within streetscape Tree pit Actively watered with stormwater harvesting or recycled water (purple pipe)	Street tree - Smaller verge (1.6m) Carpark Park
<i>Melia azedarach</i>	White cedar	Deciduous tree growing up to 13 m high and 10 m wide with a rounded crown. Features fern-like green foliage turning yellow in autumn, and clusters of fragrant purple-lilac flowers in spring followed by yellow berries.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Roundabout /Median Carpark Park
<i>Myrsine variabilis</i>	Muttonwood	Small tree to 10m tall. Cream flowers followed by purple/blue small fruit.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Naturalised planting Street tree - Smaller verge (1.6m) Park
<i>Podocarpus elatus</i>	Plum Pine	Tall evergreen conifer reaching up to 40 m in the wild, typically 10–15 m in cultivation. Features a straight trunk, brown furrowed bark, and glossy dark green leaves. Produces edible bluish-black fruit.	Passively watered street tree (Infiltration trench) Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Naturalised planting Street tree - Smaller verge (1.6m) Town Centre/Plaza Roundabout /Median Carpark Park

BOTANICAL NAME	COMMON NAME	DESCRIPTION	INFRASTRUCTURE TYPE:	SUITABLE LOCATION:
<i>Planchonella australis</i>	Black Apple	Medium to tall rainforest tree up to 15 m high with a dense crown of dark green, glossy foliage. Produces edible black, plum-like fruit with red flesh.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Street tree - Smaller verge (1.6m) Roundabout /Median Carpark Park
<i>Rhodospheera rhodanthema</i>	Tulip Satinwood	Grows up to 20m tall with a rounded canopy. Lots of red flowers in spring followed by fruit.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Naturalised planting Street tree - Larger verge (2.1m) Roundabout /Median Park
<i>Sarcomelicope simplicifolia</i>	Yellow wood	Small-medium tree that grows to 15m with glossy foliage that smells of citrus when crushed. Produces yellow-fruit that attract birds.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Naturalised planting Street tree - Smaller verge (1.6m) Park
<i>Stenocarpus salignus</i>	Scrub Beefwood	Evergreen tree reaching up to 30 m tall with dark brown, scaly bark and leathery, dark green leaves. Produces clusters of creamy-white flowers.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Street tree - Smaller verge (1.6m) Carpark Park
<i>Stenocarpus sinuatus</i>	Firewheel Tree	Medium to large evergreen tree up to 30 m tall with glossy green leaves and striking red, wheel-shaped flowers in summer.	Passively watered street tree (Infiltration trench) Actively watered with stormwater harvesting or recycled water (purple pipe)	Street tree - Smaller verge (1.6m) Town Centre/Plaza Roundabout /Median Carpark Park
<i>Streblus brunonianus</i>	Whalebone Tree	Small-medium tree with glossy green leaves. Produces creamy coloured flowers followed by red fleshy fruit which attracts birds.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Naturalised planting Street tree - Smaller verge (1.6m)

BOTANICAL NAME	COMMON NAME	DESCRIPTION	INFRASTRUCTURE TYPE:	SUITABLE LOCATION:
				Town Centre/Plaza Carpark Park
<i>Syzygium australe</i>	Brush Cherry	Evergreen tree growing 3–10 m high with a dense, compact habit. Features glossy green leaves with bronze new growth, white flowers in spring, and edible dark purple berries.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Naturalised planting Street tree - Smaller verge (1.6m) *not over footpath Carpark Park
<i>Syzygium leumahnii</i>	Riberry	Medium-sized evergreen tree up to 10–15 m tall with dense, weeping foliage. Produces white flowers followed by red, edible fruit.	Passively watered street tree (Infiltration trench) Actively watered with stormwater harvesting or recycled water (purple pipe)	Street tree - Smaller verge (1.6m) not over footpath Roundabout /Median Carpark Park
<i>Syzygium oleosum</i>	Blue Lilly Pilly	Small to medium evergreen tree up to 15 m high with glossy green leaves and attractive blue to purple edible berries.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Street tree - Smaller verge (1.6m) *not over footpath Park
<i>Syzygium paniculata</i>	Magenta Lilly Pilly	Evergreen tree up to 15 m tall with dense foliage, white flowers, and bright magenta edible fruit.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Street tree - Smaller verge (1.6m) *not over footpath Roundabout /Median Park
<i>Toona ciliata</i>	Red Cedar	Deciduous tree up to 35 m tall with a straight trunk and spreading crown. Features pinnate leaves and small white flowers, followed by winged seeds. Timber is highly valued.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Bioretention embankment Actively watered with stormwater harvesting or recycled water (purple pipe)	Naturalised planting Street tree - Larger verge (2.1m) Roundabout /Median Park
<i>Tristanopsis laurina</i> and cultivars	Water gum	A very commonly planted tree, smooth brown-grey mottled bark. Grows between 5-15m tall. Yellow flowers in summer.	Passively watered street tree (Infiltration trench) Swale (offset from centre)	Garden Naturalised planting

BOTANICAL NAME	COMMON NAME	DESCRIPTION	INFRASTRUCTURE TYPE:	SUITABLE LOCATION:
			Bioretention embankment Raingarden blister within streetscape Tree pit Actively watered with stormwater harvesting or recycled water (purple pipe)	Street tree - Smaller verge (1.6m) Town Centre/Plaza Roundabout /Median Carpark Park
<i>Waterhousia floribunda</i>	Weeping lilly Pilly	Small tree with shiny leaves and dark grey, flaky bark. The white flowers appear from late spring to mid-summer	Passively watered street tree (Infiltration trench) Swale (offset from centre) Actively watered with stormwater harvesting or recycled water (purple pipe)	Street tree - Smaller verge (1.6m) Street tree - Larger Roundabout /Median Carpark Park

Exotic Species

Note: The number of deciduous trees around WSUD assets and road assets needs to be carefully considered due to bulk leaf shed in autumn/winter which can block stormwater assets. This may also increase maintenance costs – eg Increased streetsweeper operations and manual cleanouts of drains.

Many commonly used deciduous varieties have been excluded from this list due to their weed potential, especially in WSUD systems.

<i>Calodendron capense</i>	Cape Chestnut	Semi-deciduous tree growing 10–15 m high and 6–10 m wide. Noted for its showy pink to mauve flowers in summer.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Actively watered with stormwater harvesting or recycled water (purple pipe)	Street tree - Smaller verge (1.6m) Town Centre/Plaza Roundabout Carpark Park
<i>Cercis chinensis 'Avondale'</i>	Chinese Redbud	Small deciduous tree, 3–5 m high and 2–3 m wide. Produces profuse magenta flowers along branches before leaves emerge in spring.	Infrastructure type: Passively watered street tree (Infiltration trench) Swale (offset from centre) Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Naturalised planting Street tree - Smaller verge (1.6m) Town Centre/Plaza Roundabout Carpark Park
<i>Ficus hillii</i>	Hill's Weeping Fig	Evergreen tree reaching 15–30 m high and 5–8 m wide. Dense, glossy foliage suitable for hedging and screening.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Actively watered with stormwater harvesting or recycled water (purple pipe)	Town Centre/Plaza Roundabout Carpark

BOTANICAL NAME	COMMON NAME	DESCRIPTION	INFRASTRUCTURE TYPE:	SUITABLE LOCATION:
				Park
<i>Ginkgo biloba</i> <i>Male trees only</i>	Maidenhair tree	Deciduous tree growing 15–24 m high and 12–18 m wide. Fan-shaped leaves turn golden yellow in autumn. Tolerant of urban conditions. Male trees only due to female trees producing fruit that has a strong odour.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Actively watered with stormwater harvesting or recycled water (purple pipe)	Street tree - Larger verge (2.1m) Roundabout Carpark Park
<i>Lagerstroemia</i> spp.	Crepe Myrtle	Deciduous small tree or large shrub, 3–8 m high and 3–6 m wide. Noted for its long-lasting summer flowers in various colours.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Street tree - Smaller verge (1.6m) Town Centre/Plaza Carpark Park
<i>Liriodendron tulipifera</i>	Tulip Tree	Fast-growing deciduous tree reaching 20–30 m high and 10–15 m wide. Features tulip-shaped flowers in spring and brilliant yellow fall color.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Actively watered with stormwater harvesting or recycled water (purple pipe)	Street tree - Larger verge (2.1m) Town Centre/Plaza Roundabout Carpark Park
<i>Metasequoia glyptostroboides</i>	Dawn Redwood	Deciduous conifer growing 20–30 m high and 6–8 m wide. Features feathery foliage that turns orange-brown in autumn.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Actively watered with stormwater harvesting or recycled water (purple pipe)	Roundabout Carpark Park
<i>Nyssa sylvatica</i>	Black Gum	Deciduous tree reaching 10–15 m high and 6–9 m wide. Noted for its brilliant red fall foliage and wildlife habitat features.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Street tree - Larger verge (2.1m) Town Centre/Plaza Roundabout Carpark Park
<i>Prunus</i> spp. <i>Serrulata</i> - 1.8m standard/clear trunk tree form <i>X blirerana</i>	Cherry/Plum	Deciduous trees varying from 4–12 m high and 4–8 m wide. Known for their spring blossoms and, in some species, edible fruit.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Street tree - Smaller verge (1.6m) Town Centre/Plaza Roundabout Carpark Park

BOTANICAL NAME	COMMON NAME	DESCRIPTION	INFRASTRUCTURE TYPE:	SUITABLE LOCATION:
<i>Pyrus spp.</i> <i>Ussuriensis</i> <i>Nivalis</i> <i>NO CALLERYANA VARIETIES</i>	Ornamental Pear	Deciduous trees growing 8–12 m high and 6–8 m wide. Features white spring blossoms and vibrant autumn foliage.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Street tree - Larger verge (2.1m) Town Centre/Plaza Roundabout Carpark Park
<i>Taxodium Species</i>	Bald Cypress	Deciduous conifer reaching 15–25 m high and 6–10 m wide. Tolerant of wet conditions; features feathery foliage that turns russet in autumn.	Passively watered street tree (Infiltration trench) Swale (offset from centre)	Roundabout Park
Suitable Community Garden Fruit Trees Note: Provide for community resilience, sustainability and education. Fruit trees are to be limited to planned community garden locations where they can receive additional care and maintenance. Tree species/cultivars used need to be based on what would be suitable for WSUD conditions, public interface and limit fruit fly and other pests. Fruit trees generally don't do well with groundcover competition. They require mulched rings at least 1m diameter with steel or recycled plastic edging dug into the ground and 100mm above ground.				
<i>Citrus</i>	Kumquat	'Nagami' and 'Meiwa' varieties perform well in Wollondilly. 2.5-4m tall. Small orange citrus fruit that can be eaten straight from the tree or turned into jams/marmalade.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Street tree - Smaller verge (1.6m) Town Centre/Plaza Park
<i>Citrus</i>	Lemon	Choose an appropriate variety that crops well and can cope with Wollondilly weather conditions. Eg - 'eureka'	Passively watered street tree (Infiltration trench) Swale (offset from centre) Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Street tree - Smaller verge (1.6m) Town Centre/Plaza Park
<i>Citrus</i>	Lime	Choose an appropriate variety that crops well and can cope with Wollondilly weather conditions.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Street tree - Smaller verge (1.6m) Town Centre/Plaza Park
<i>Citrus</i>	Orange	Choose an appropriate variety that crops well and can cope with Wollondilly weather conditions. Eg - 'naval' and 'cara cara'. Combining an early and a late season variety will extend the harvest for the community.	Passively watered street tree (Infiltration trench) Swale (offset from centre) Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Street tree - Smaller verge (1.6m) Town Centre/Plaza

BOTANICAL NAME	COMMON NAME	DESCRIPTION	INFRASTRUCTURE TYPE:	SUITABLE LOCATION:
				Park
<i>Citrus</i>	Mandarin	Choose an appropriate variety that crops well and can cope with Wollondilly weather conditions. Eg - 'Imperial' and 'Afourer'.	Passively watered street tree (Infiltration trench) Swale (offset from centre Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Street tree - Smaller verge (1.6m) Town Centre/Plaza Park
<i>Juglans regia</i>	Walnut	Choose a variety that has a lower chill than most walnut varieties and can crop well in the Subtropics like 'Placentia'. Self-pollinating variety preferred or include pollinating partner. Not to be planted in mow areas due to fallen nuts being a hazard when mowing.	Passively watered street tree (Infiltration trench) Swale (offset from centre Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Street tree - Smaller verge (1.6m) Town Centre/Plaza Park
<i>Macadamia integrifolia</i>	Macadamia	Australian native nut tree. Choose appropriate variety for site conditions. Not to be planted in mow areas due to fallen nuts being a hazard when mowing.	Passively watered street tree (Infiltration trench) Swale (offset from centre Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Park
<i>Prunus dulcis</i>	Almond	Choose a variety that is suited to Wollondilly conditions like 'All in one'. 'All in one' is also a smaller tree which makes harvesting easier for the community Self-pollinating variety preferred or include pollinating partner.	Passively watered street tree (Infiltration trench) Swale (offset from centre Actively watered with stormwater harvesting or recycled water (purple pipe)	Garden Street tree - Smaller verge (1.6m) Town Centre/Plaza Park